


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES



- With Built-in Bias Resistors
- Simplify Circuit Design
- Reduce a Quantity of Parts and Manufacturing Process

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(k Ω)	R2(k Ω)
KRA107	10	47
KRA108	22	47
KRA109	47	22

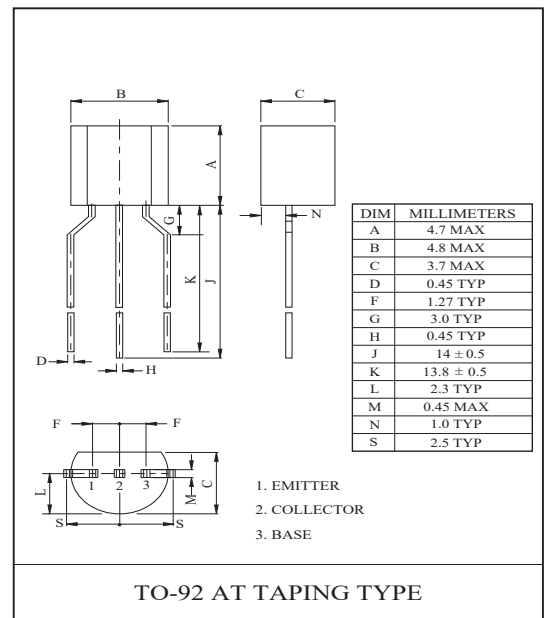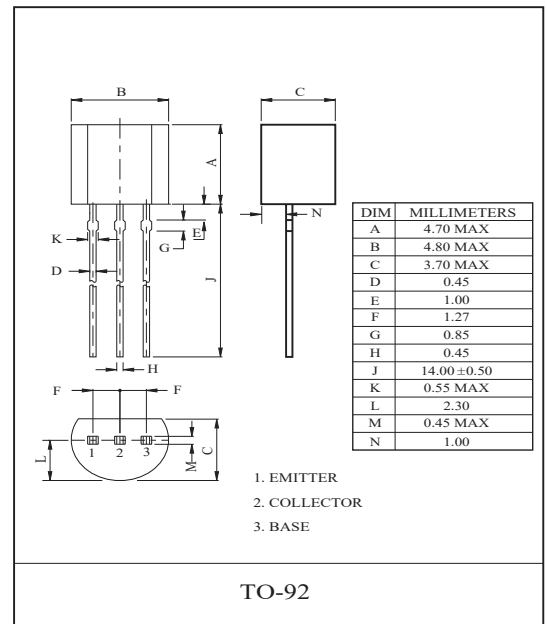

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRA107 ~ 109	V _O	-50	V
Input Voltage	KRA107	V _I	-30, 6	V
	KRA108		-40, 7	
	KRA109		-40, 15	
Output Current	KRA107 ~ 109	I _O	-100	mA
Power Dissipation		P _D	625	mW
Junction Temperature		T _J	-55~150	°C
Storage Temperature Range		T _{stg}	-55~150	°C







KRA107~KRA109

ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT		
Output Cut-off Current		KRA107 ~ 109	I _{O(OFF)}	V _O =-50V, V _I =0	-	-	-500	nA	
DC Current Gain	KRA107	G _I	V _O =-5V, I _O =-10mA	80	150	-			
	KRA108			80	150	-			
	KRA109			70	140	-			
Output Voltage		KRA107 ~ 109	V _{O(ON)}	I _O =-10mA, I _I =-0.5mA	-	-0.1	-0.3	V	
Input Voltage (ON)	KRA107	V _{I(ON)}	V _O =-0.2V, I _O =-5mA	-	-1.2	-1.8	V		
	KRA108			-	-1.8	-2.6			
	KRA109			-	-3.0	-5.8			
Input Votlage (OFF)	KRA107	V _{I(OFF)}	V _O =-5V, I _O =-0.1mA	-0.5	-0.75	-	V		
	KRA108			-0.6	-0.88	-			
	KRA109			-1.5	-1.82	-			
Transition Frequency		KRA107 ~ 109	f _T *	V _O =-10V, I _O =-5mA	-	200	-	MHz	
Input Current	KRA107	I _I	V _I =-5V	-	-	-0.88	mA		
	KRA108			-	-	-0.36			
	KRA109			-	-	-0.16			
Input Resistor	KRA107	R1	-	7	10	13	kΩ		
	KRA108			15.4	22	28.6			
	KRA109			32.9	47	61.1			
Input Resistor	KRA107	R2	-	32.9	47	61.1	kΩ		
	KRA108			32.9	47	61.1			
	KRA109			15.4	22	28.6			
Switching Time	Rise Time	KRA107	t _r	V _O =-5V, V _{IN} =-5V R _L =1kΩ	-	0.07	-	μS	
		KRA108			-	0.20	-		
		KRA109			-	0.38	-		
	Storage Time	KRA107			t _{stg}	-	1.1		-
		KRA108				-	0.3		-
		KRA109				-	0.7		-
	Fall Time	KRA107			t _f	-	0.35		-
		KRA108				-	0.4		-
		KRA109				-	0.48		-

Note : * Characteristic of Transistor Only.

KRA107~KRA109

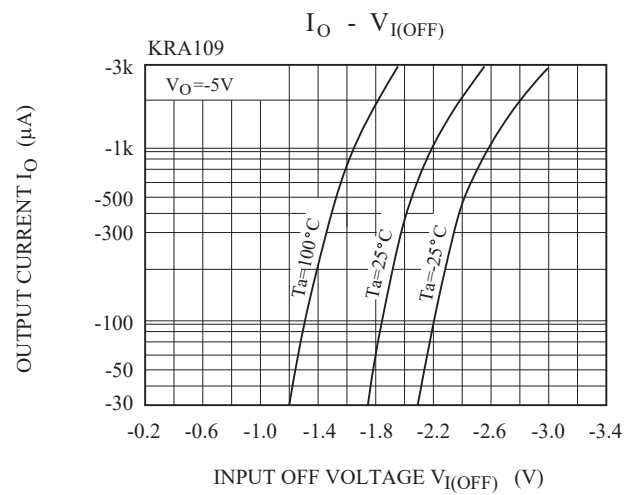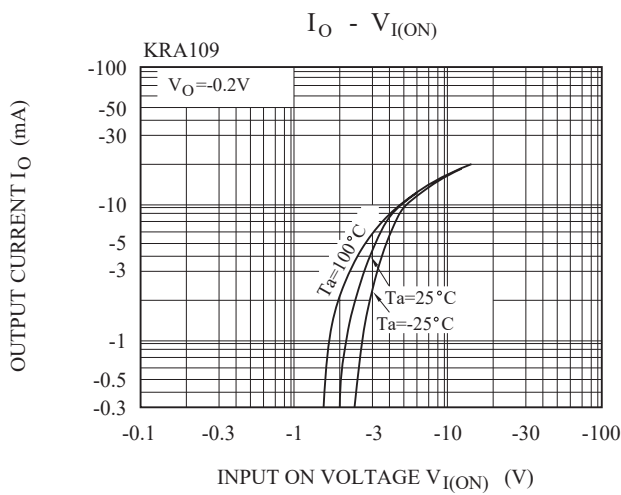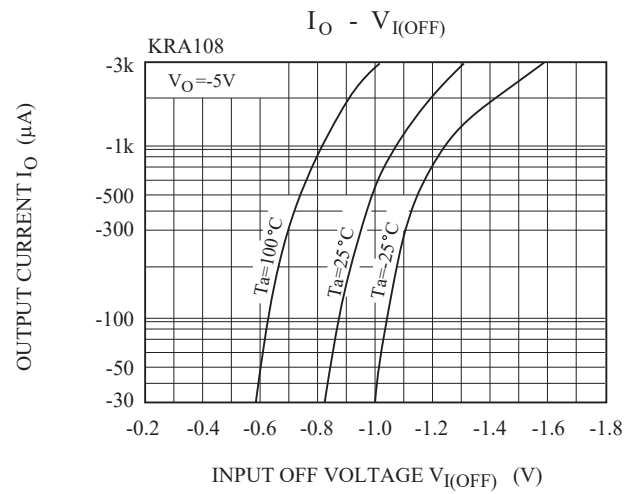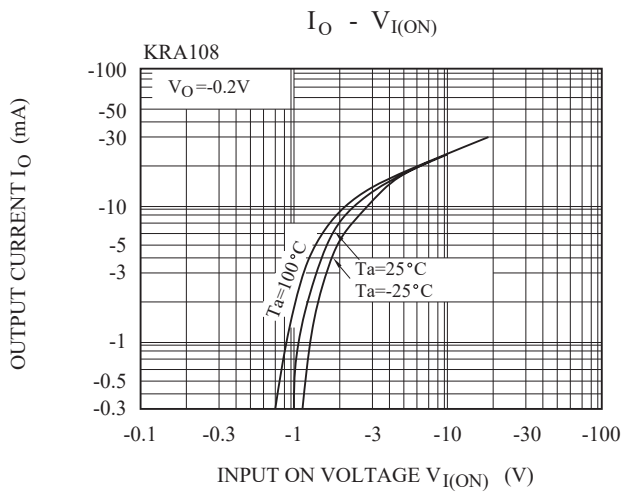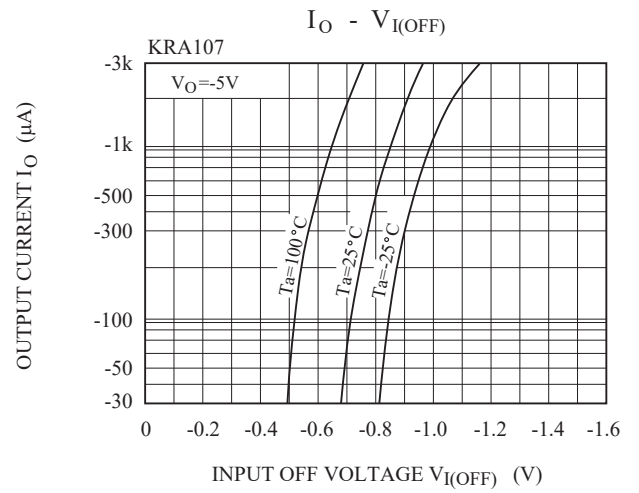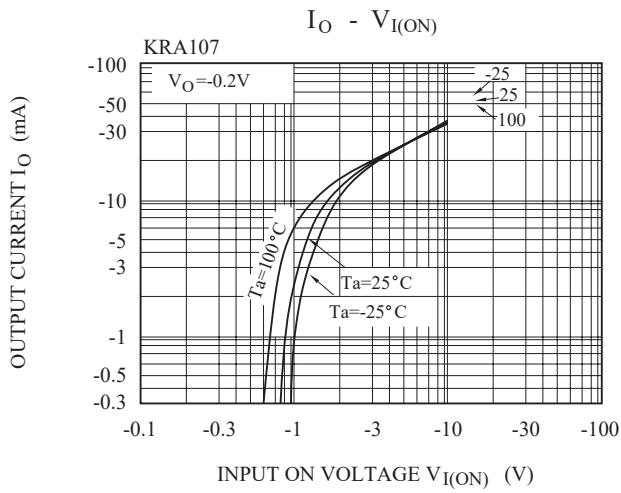

KRA107~KRA109

