


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors
- Simplify Circuit Design
- Reduce a Quantity of Parts and Manufacturing Process
- High Packing Density
- Suffix U : Qualified to AEC-Q101.
ex) KRA307V-RTL/HU

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(kΩ)	R2(kΩ)
KRA307V	10	47
KRA308V	22	47
KRA309V	47	22

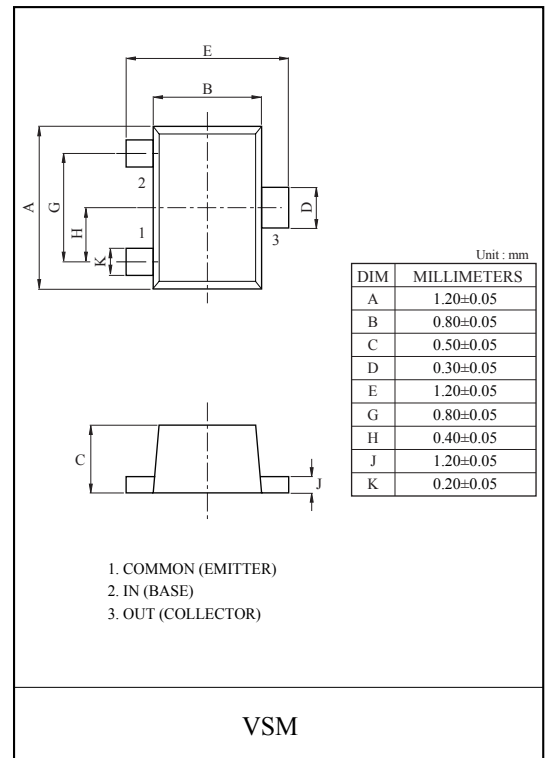


MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRA307V ~ 309V	V_O	-50	V
Input Voltage	KRA307V	V_I	-30, 6	V
	KRA308V		-40, 7	
	KRA309V		-40, 15	
Output Current	KRA307V ~ 309V	I_O	-100	mA
Power Dissipation		P_D	100	mW
Junction Temperature		T_j	-55 ~ 150	°C
Storage Temperature Range		T_{stg}	-55 ~ 150	°C

MARK SPEC

TYPE	KRA307V	KRA308V	KRA309V
MARK	PH	PI	PJ









KRA307V~KRA309V

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT		
Output Cut-off Current		KRA307V ~ 309V	$I_{O(OFF)}$	$V_0=-50V, V_1=0$	-	-	-500	nA	
DC Current Gain	KRA307V	G_I	$V_0=-5V, I_0=-10mA$	80	150	-			
	KRA308V			80	150	-			
	KRA309V			70	140	-			
Output Voltage		KRA307V ~ 309V	$V_{O(ON)}$	$I_0=-10mA, I_1=-0.5mA$	-	-0.1	-0.3	V	
Input Voltage (ON)	KRA307V	$V_{I(ON)}$	$V_0=-0.2V, I_0=-5mA$	-	-1.2	-1.8	V		
	KRA308V			-	-1.8	-2.6			
	KRA309V			-	-3.0	-5.8			
Input Voltage (OFF)	KRA307V	$V_{I(OFF)}$	$V_0=-5V, I_0=-0.1mA$	-0.5	-0.75	-	V		
	KRA308V			-0.6	-0.88	-			
	KRA309V			-1.5	-1.82	-			
Transition Frequency		KRA307V ~ 309V	f_T^*	$V_0=-10V, I_0=-5mA$	-	200	-	MHz	
Input Current	KRA307V	I_I	$V_I=-5V$	-	-	-0.88	mA		
	KRA308V			-	-	-0.36			
	KRA309V			-	-	-0.16			
Switching Time	Rise Time	KRA307V	t_r	$V_0=-5V, V_{IN}=-5V$ $R_L=1k\Omega$	-	0.07	-	μS	
		KRA308V			-	0.20	-		
		KRA309V			-	0.38	-		
	Storage Time	KRA307V			t_{stg}	-	1.1		-
		KRA308V				-	1.3		-
		KRA309V				-	0.7		-
	Fall Time	KRA307V			t_f	-	0.35		-
		KRA308V				-	0.4		-
		KRA309V				-	0.48		-
Input Resistor	KRA307V	R1	-	7	10	13	k Ω		
	KRA308V			15.4	22	28.6			
	KRA309V			32.9	47	61.1			
Resistor Ratio	KRA307V	R2/R1	-	3.7	4.7	5.7			
	KRA308V			1.7	2.1	2.6			
	KRA309V			0.37	0.47	0.57			

Note : * Characteristic of Transistor Only.

KRA307V~KRA309V

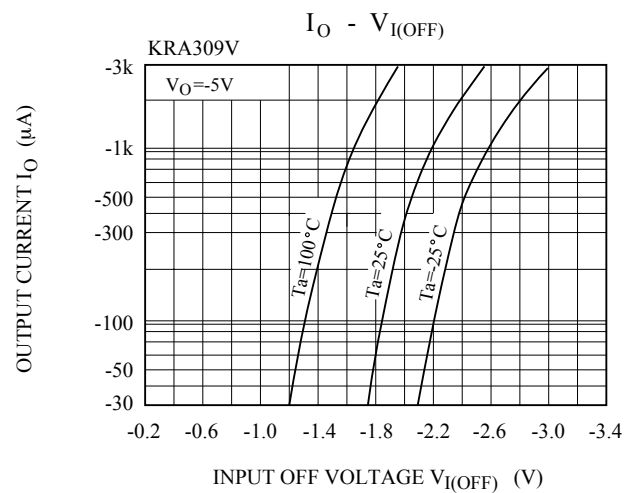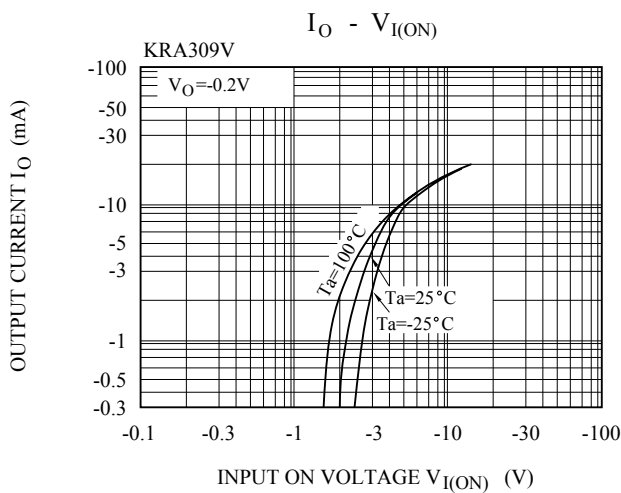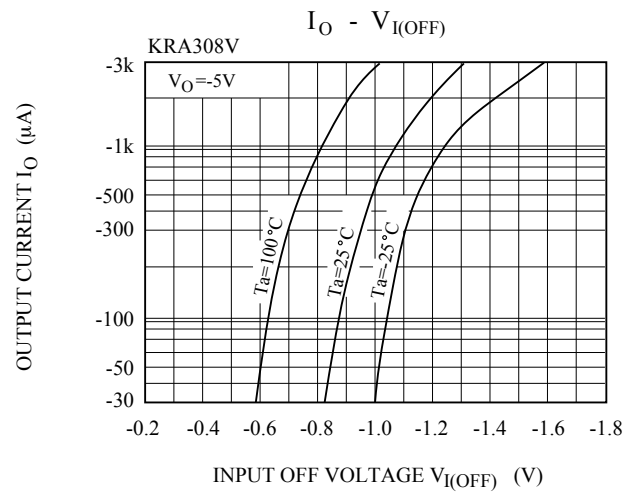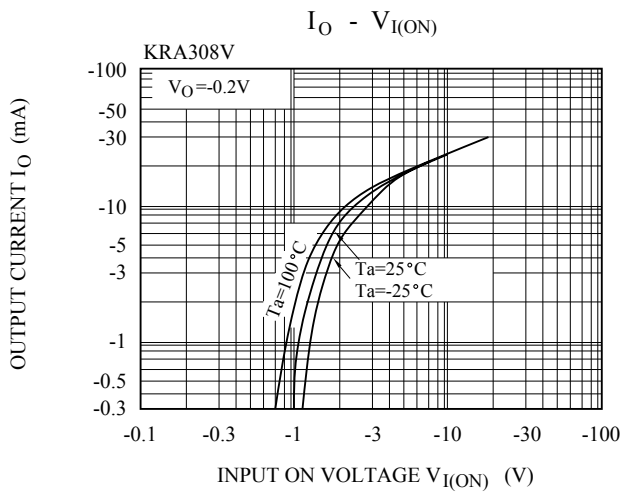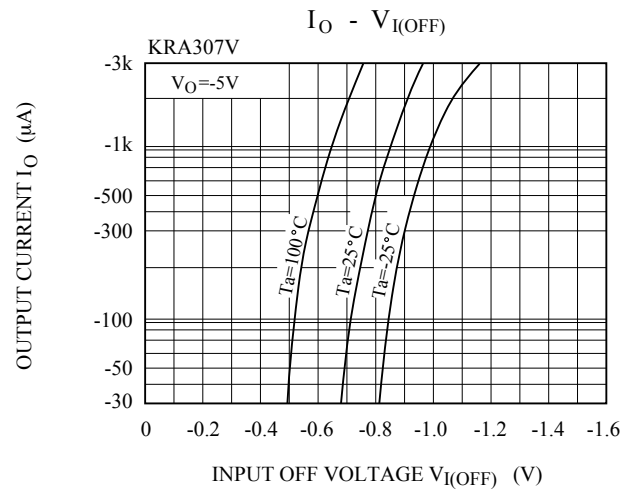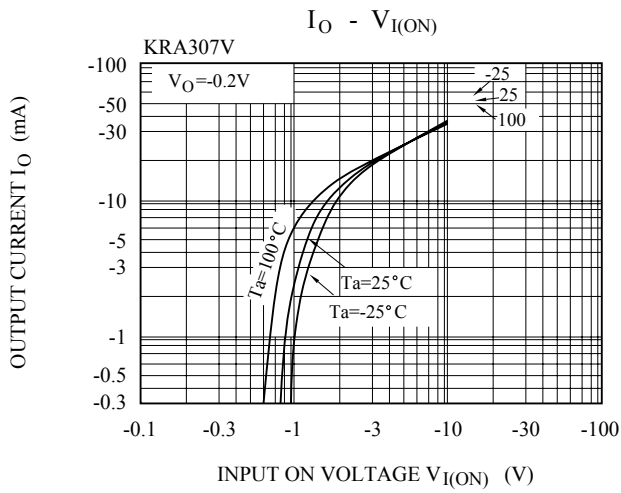

KRA307V~KRA309V

