

Protection in Portable Electronics Applications.

FEATURES

- Transient protection for data lines to
 - IEC61000-4-2(ESD) : Air mode $\pm 30\text{kV}$ / Contact mode $\pm 30\text{kV}$
 - IEC61000-4-5(Surge) : $5\text{A}(tp=8/20\ \mu\text{s})$
- Low capacitance $C_T = 9\text{pF}(\text{Max})$
- Bi-directional, symmetrical working voltage up to : $V_{RWM} = \pm 5\text{V}$
- Extremely small Size $0.6 \times 0.3 \times 0.3\text{mm}$
- Low reverse current : 10nA typical ($V_{RWM}=5\text{V}$)



ELP-2A (leadless-type)

PRODUCT DESCRIPTION

- Molding compound flammability rating : UL 94V-0
- Pb-Free, Halogen-Free, RoHs Compliant

Package dimensions (ELP-2A)	Pin configurations (Bi-directional)																		
<table border="1"> <thead> <tr> <th>DIM</th> <th>MILLIMETERS</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0.60 ± 0.05</td> </tr> <tr> <td>B</td> <td>0.30 ± 0.05</td> </tr> <tr> <td>C</td> <td>0.30 ± 0.05</td> </tr> <tr> <td>D</td> <td>0.23 ± 0.05</td> </tr> <tr> <td>E</td> <td>0.15 ± 0.05</td> </tr> <tr> <td>F</td> <td>BSC 0.37</td> </tr> <tr> <td>G1</td> <td>BSC 0.04</td> </tr> <tr> <td>G2</td> <td>BSC 0.035</td> </tr> </tbody> </table>	DIM	MILLIMETERS	A	0.60 ± 0.05	B	0.30 ± 0.05	C	0.30 ± 0.05	D	0.23 ± 0.05	E	0.15 ± 0.05	F	BSC 0.37	G1	BSC 0.04	G2	BSC 0.035	<p>1. ANODE 2. ANODE</p>
DIM	MILLIMETERS																		
A	0.60 ± 0.05																		
B	0.30 ± 0.05																		
C	0.30 ± 0.05																		
D	0.23 ± 0.05																		
E	0.15 ± 0.05																		
F	BSC 0.37																		
G1	BSC 0.04																		
G2	BSC 0.035																		

ORDERING INFORMATION


Part Number	Qty per Reel	Reel Size	Marking code
PS05CBEL2A-RTK	5,000	7 inch	T
PS05CBEL2A-RTL	10,000		
PS05CBEL2A-RTH	5,000		
PS05CBEL2A-RTR	10,000		

PS05CBEL2A

MAXIMUM RATING (Ta=25)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Peak Pulse Power (tp=8/20 μs)	P _{PK}	60	W
Peak Pulse Current (tp=8/20 μs)	I _{PP}	5	A
Junction Temperature	T _J	150	
Storage Temperature	T _{stg}	-55 150	

DEFINITIONS OF ELECTRICAL CHARACTERISTIC SYMBOL

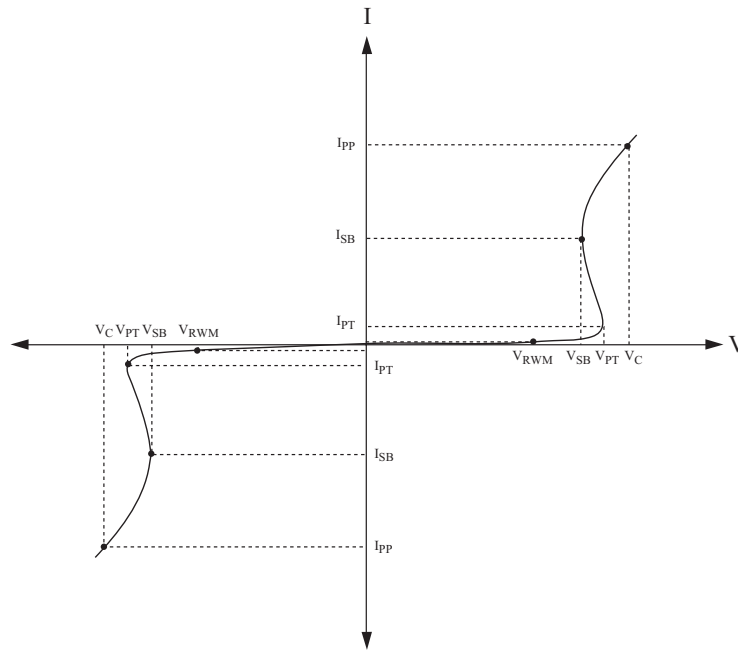


ELECTRICAL CHARACTERISTICS (Ta=25)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Reverse Stand-Off Voltage	V _{RWM}	-	-	-	5	V	
Reverse Leakage Current	I _R	V _{RWM} =5V	-	10	50	nA	
Snap-back Voltage	V _{SB}	I _{SB} =100uA, I _{SB} =50mA	5.5	-	-	V	
Punch-through Voltage	V _{PT}	I _{PT} =2 μA	6	8.2	9.5	V	
Total Capacitance	C _T	V _R =0V, f=1MHz	-	6	9	pF	
Clamping Voltage	V _C	I _{PP} =1A, tp=8/20 μs	-	-	8	V	
		I _{PP} =5A, tp=8/20 μs	-	-	12		
		I _{TLP} =4A, tp=100ns	-	7	12		
		I _{TLP} =24A, tp=100ns	-	12	17		
Electrostatic Discharge	V _{ESD}	IEC61000-4-2	Air	± 30	-	-	kV
			Contact	± 30			

PS05CBEL2A


NON-REPETITIVE PEAK PULSE
POWER VS. PULSE TIME

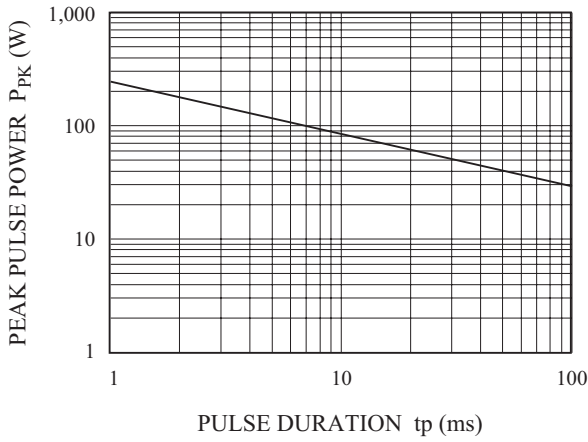


POWER DERATION CURVE

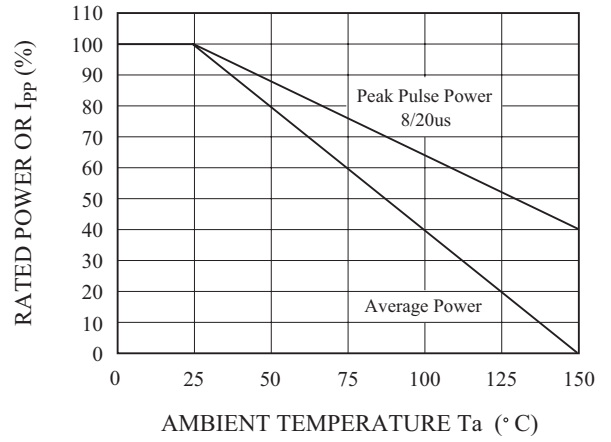


$I_R - V_R$

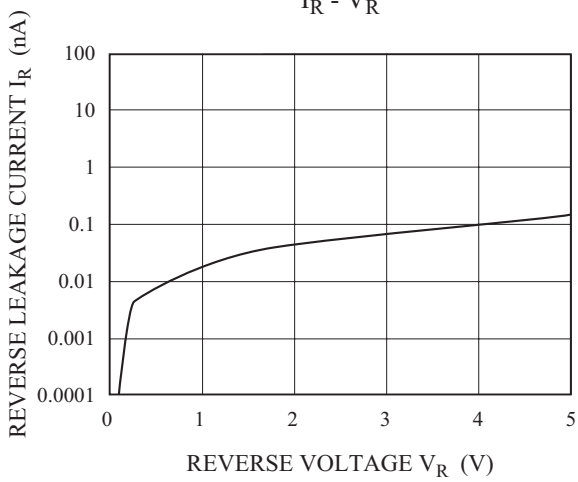


$C_T - V_R$

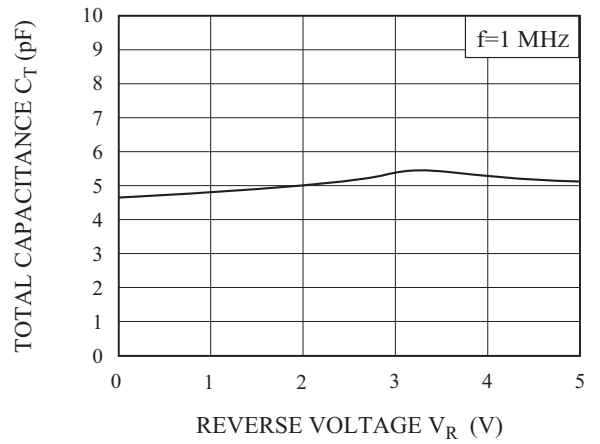


$I_{PP} - V_C$

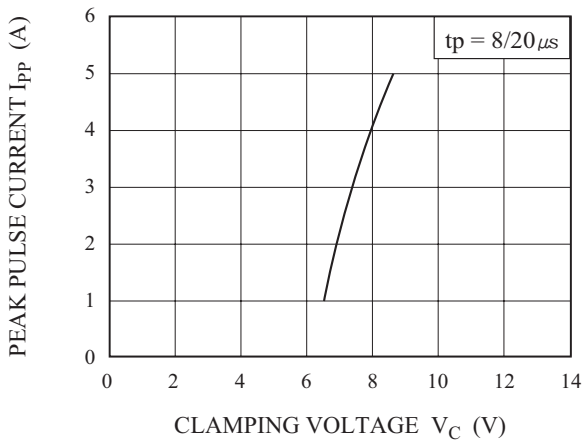


$I_{TLP} - V_C$

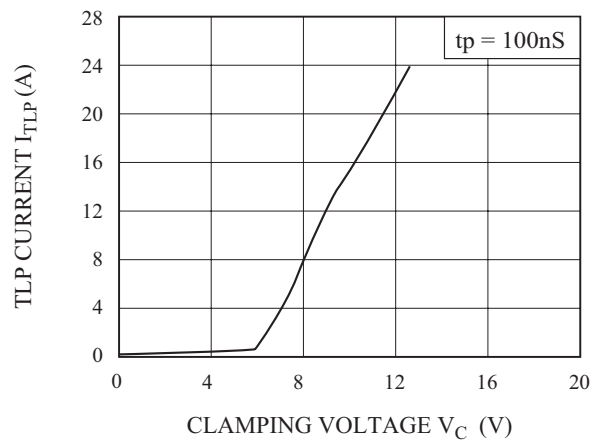

PS05CBEL2A

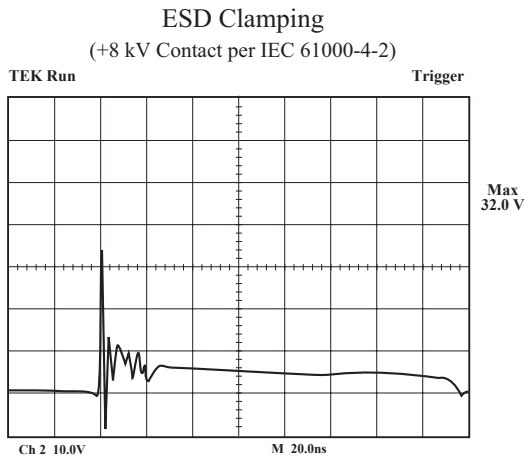


Note : Data is taken with a 10x attenuator

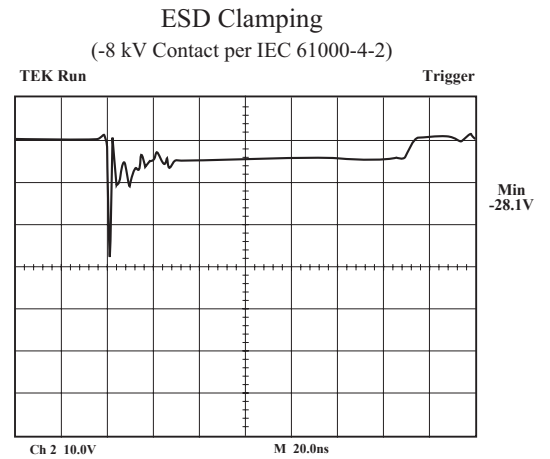

Note : Data is taken with a 10x attenuator


PULSE WAVEFORM

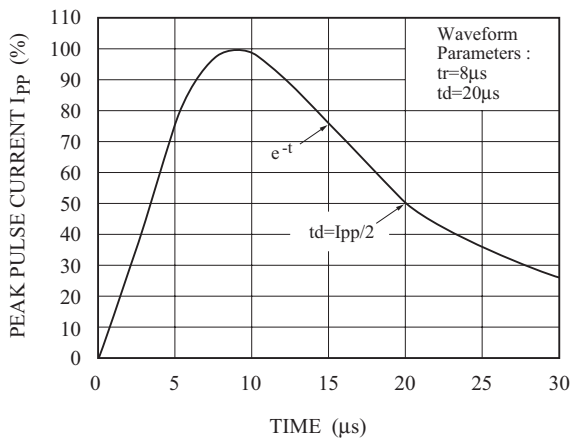

PS05CBEL2A

APPLICATIONS

- USB 2.0, 10/100/1000 Ethernet, DVI, HDMI, S-ATA
- MDDI Port
- LCD-Display, Camera
- GPS / FM Antennas
- LVDS
- High speed data lines

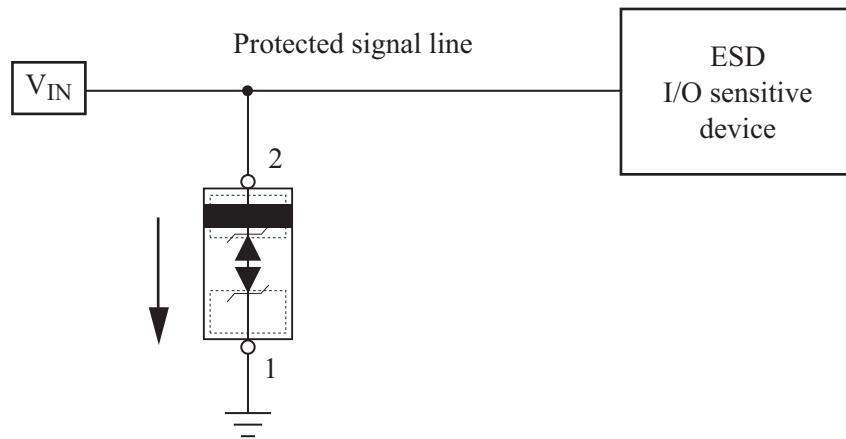

Recommended pad dimension & Marking Information

Recommended pad dimension	Marking Code