

DC-DC CONVERTERS RELAY DRIVERS, LAMP DRIVERS,
MOTOR DRIVERS, STROBES APPLICATION.

FEATURES

- Adoption of FBET, MBIT Processes.
- High Current Capacitance.
- Low Collector-to-Emitter Saturation Voltage.
- High-Speed Switching.
- Ultrasmall Package Facilitates Miniaturization in end Products.
- High Allowable Power Dissipation.
- Complementary to KTA1552T.
- Suffix U : Qualified to AEC-Q101
ex) KTC3552T-RTK/HU



MAXIMUM RATING (Ta=25)

| CHARACTERISTIC | | SYMBOL | RATING | UNIT |
|-----------------------------|-------|-----------|---------|------|
| Collector-Base Voltage | | V_{CBO} | 80 | V |
| Collector-Emitter Voltage | | V_{CES} | 80 | V |
| | | V_{CEO} | 50 | |
| Emitter-Base Voltage | | V_{EBO} | 6 | V |
| Collector Current | DC | I_C | 3 | A |
| | Pulse | I_{CP} | 6 | |
| Base Current | | I_B | 600 | mA |
| Collector Power Dissipation | | P_C^* | 0.9 | W |
| Junction Temperature | | T_j | 150 | |
| Storage Temperature Range | | T_{stg} | -55 150 | |


* Package mounted on a ceramic board (600mm² × 0.8mm)

ELECTRICAL CHARACTERISTICS (Ta=25)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------------|----------------|--------------------------|------|------|------|------|
| Collector Cut-off Current | I_{CBO} | $V_{CB}=40V, I_E=0$ | - | - | 0.1 | μA |
| Emitter Cut-off Current | I_{EBO} | $V_{EB}=4V, I_C=0$ | - | - | 0.1 | μA |
| Collector-Base Breakdown Voltage | $V_{(BR)CBO}$ | $I_C=10\mu A, I_E=0$ | 80 | - | - | V |
| Collector-Emitter Breakdown Voltage | $V_{(BR)CES}$ | $I_C=100\mu A, V_{BE}=0$ | 80 | - | - | V |
| | $V_{(BR)CEO}$ | $I_C=1mA, I_B=0$ | 50 | - | - | V |
| Emitter-Base Breakdown Voltage | $V_{(BR)EBO}$ | $I_E=10\mu A, I_C=0$ | 6 | - | - | V |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)1}$ | $I_C=1A, I_B=50mA$ | - | 80 | 120 | mV |
| | $V_{CE(sat)2}$ | $I_C=2A, I_B=100mA$ | - | 140 | 210 | mV |
| Base-Emitter Saturation Voltage | $V_{BE(sat)}$ | $I_C=2A, I_B=100mA$ | - | 0.88 | 1.2 | V |
| DC Current Gain | h_{FE} | $V_{CE}=2V, I_C=100mA$ | 200 | - | 560 | |
| Transition Frequency | f_T | $V_{CE}=10V, I_C=500mA$ | - | 380 | - | MHz |
| Collector Output Capacitance | C_{ob} | $V_{CB}=10V, f=1MHz$ | - | 13 | - | pF |
| Switching Time | Turn-On Time | t_{on} | - | 35 | - | nS |
| | Storage Time | t_{stg} | - | 300 | - | |
| | Fall Time | t_f | - | 22 | - | |

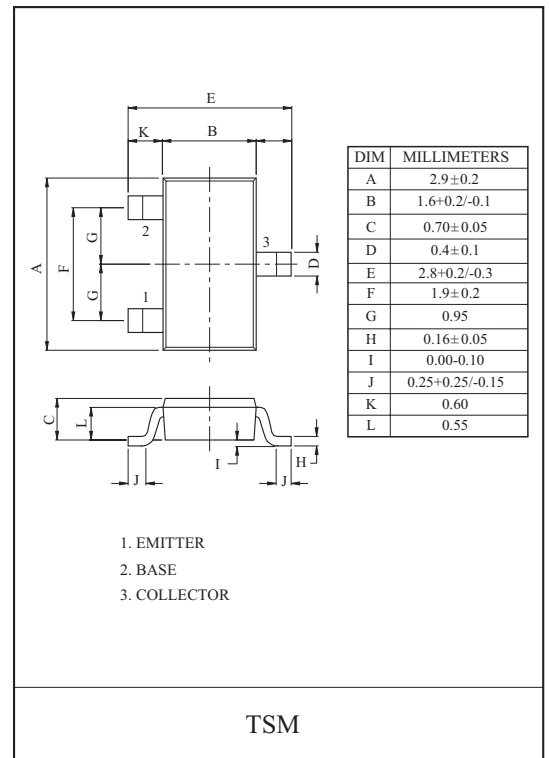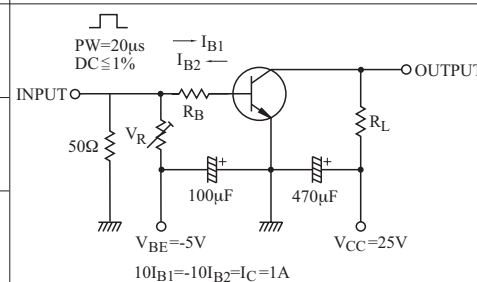


Marking

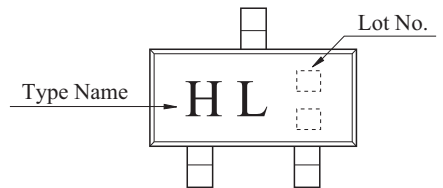


KTC3552T


$I_C - V_{CE}$

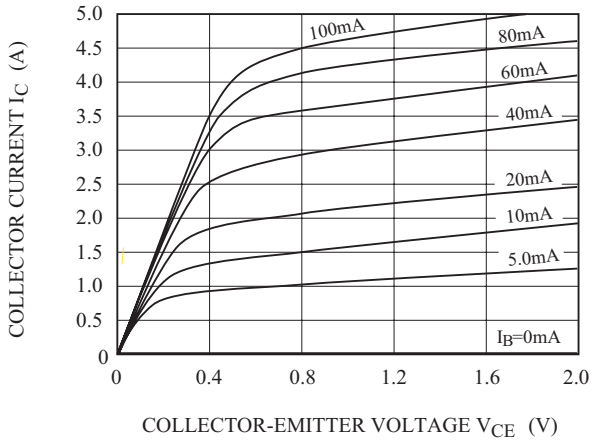


$h_{FE} - I_C$

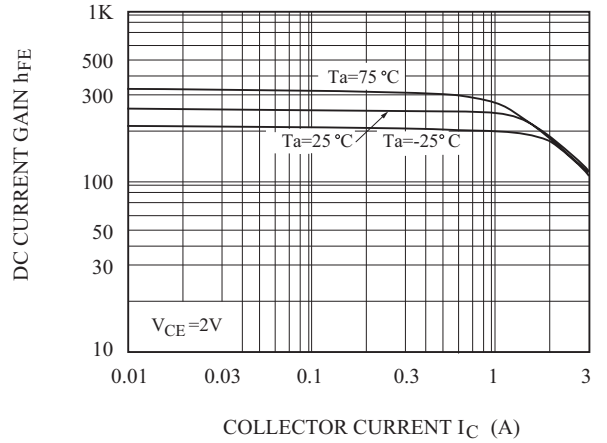


$V_{CE(sat)} - I_C$

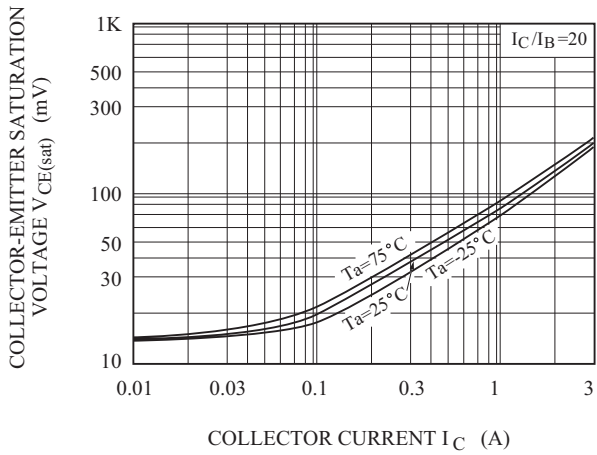


$V_{CE(sat)} - I_C$

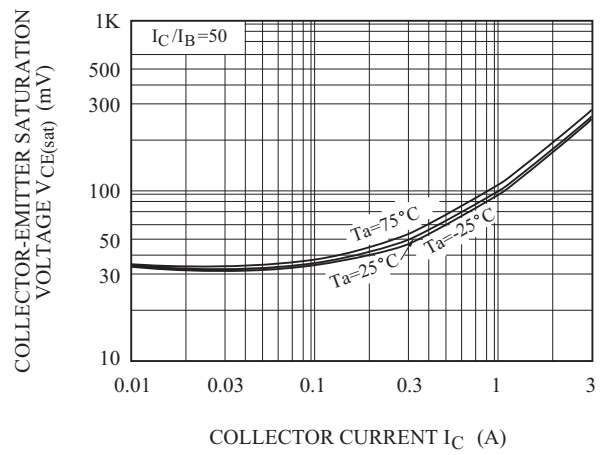

$V_{BE(sat)} - I_C$

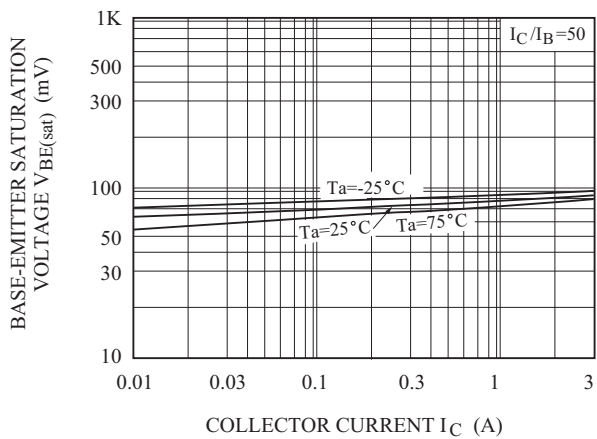

$I_C - V_{BE}$

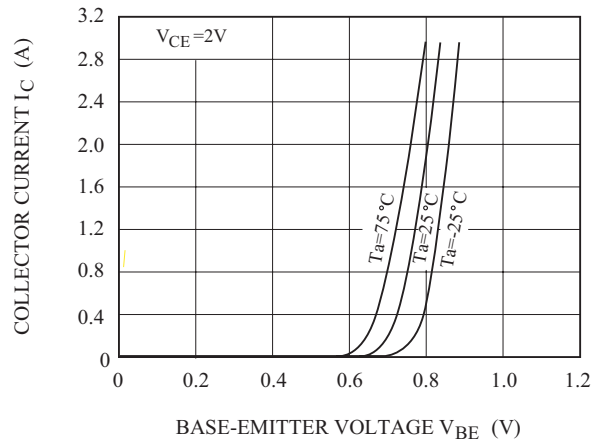

KTC3552T

