


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.



FEATURES

- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.
- Suffix U : Qualified to AEC-Q101.
ex) KRA760U-RTK/HU

EQUIVALENT CIRCUIT



EQUIVALENT CIRCUIT (TOP VIEW)

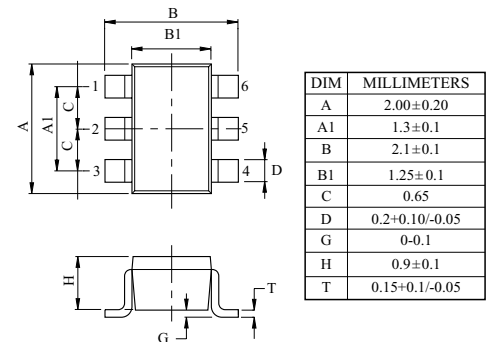

1. Q₁ EMITTER
2. Q₁ BASE
3. Q₂ COLLECTOR
4. Q₂ EMITTER
5. Q₂ BASE
6. Q₁ COLLECTOR

US6

MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V _{CBO}	-50	V
Collector-Emitter Voltage	V _{CEO}	-50	V
Emitter-Base Voltage	V _{EBO}	-5	V
Collector Current	I _C	-100	mA

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector Power Dissipation	P _C *	200	mW
Junction Temperature	T _j	-55~150	
Storage Temperature Range	T _{stg}	-55~150	

* Total Rating.


ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I _{CBO}	V _{CB} =-50V, I _E =0	-	-	-100	nA
Emitter Cut-off Current		I _{EBO}	V _{EB} =-5V, I _C =0	-	-	-100	nA
DC Current Gain		h _{FE}	V _{CE} =-5V, I _C =-1mA	120	-	-	
Collector-Emitter Saturation Voltage		V _{CE(sat)}	I _C =-10mA, I _B =-0.5mA	-	-0.1	-0.3	V
Transition Frequency		f _T *	V _{CE} =-10V, I _C =-5mA	-	250	-	MHz
Input Resistor	KRA760U	R _i		3.29	4.7	6.11	kΩ
	KRA761U			7	10	13	
	KRA762U			70	100	130	
	KRA763U			15.4	22	28.6	
	KRA764U			32.9	47	61.1	

MARK SPEC

TYPE	KRA760U	KRA761U	KRA762U	KRA763U	KRA764U
MARK	PK	PM	PN	PO	PP

Marking






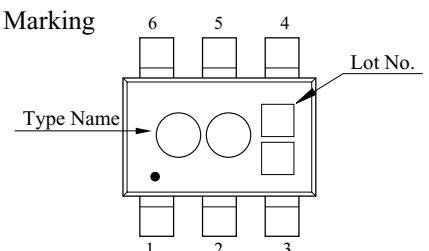


KRA760U~KRA764U

ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC			SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRA760U	t _r	V _O =-5V V _{IN} =-5V R _L =1kΩ	-	0.2	-	μs
		KRA761U			-	0.065	-	
		KRA762U			-	0.4	-	
		KRA763U			-	0.1	-	
		KRA764U			-	0.15	-	
	Storage Time	KRA760U	t _{stg}		-	2.0	-	
		KRA761U			-	1.7	-	
		KRA762U			-	3.0	-	
		KRA763U			-	2.0	-	
		KRA764U			-	1.5	-	
	Fall Time	KRA760U	t _f		-	0.3	-	
		KRA761U			-	0.3	-	
		KRA762U			-	1.7	-	
		KRA763U			-	0.8	-	
		KRA764U			-	1.5	-	

KRA760U~KRA764U

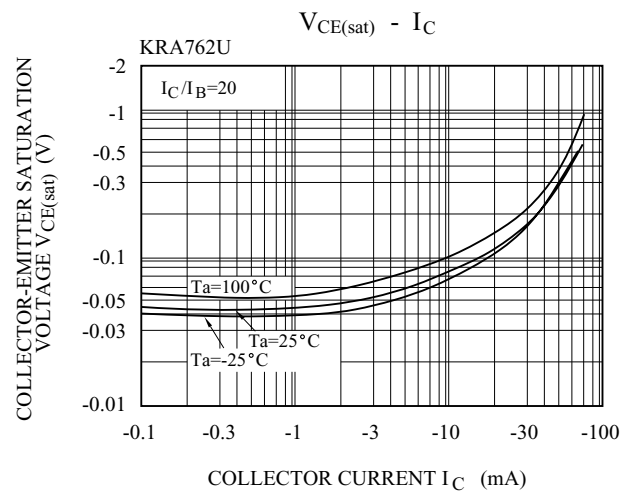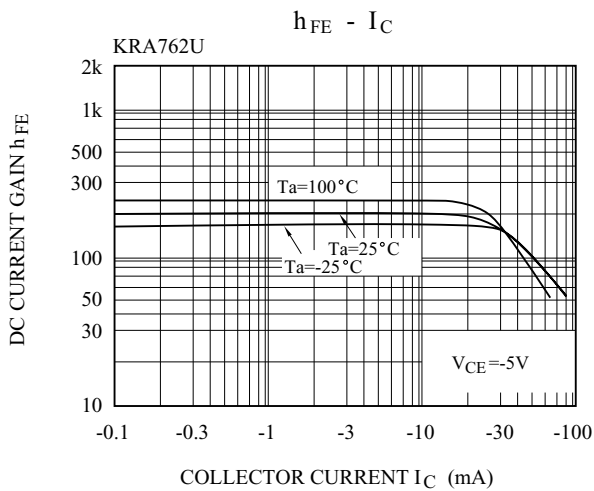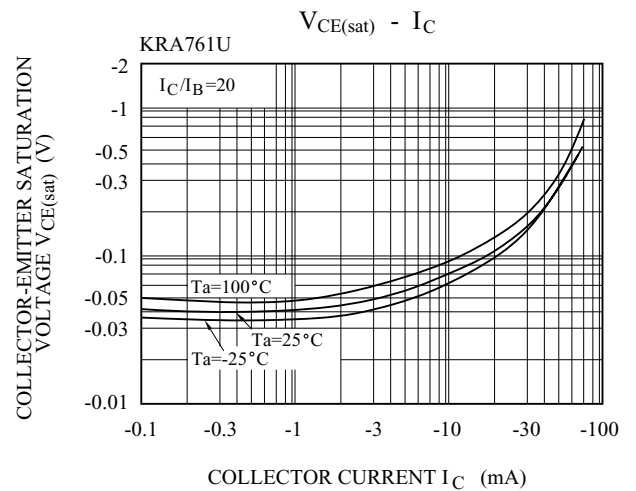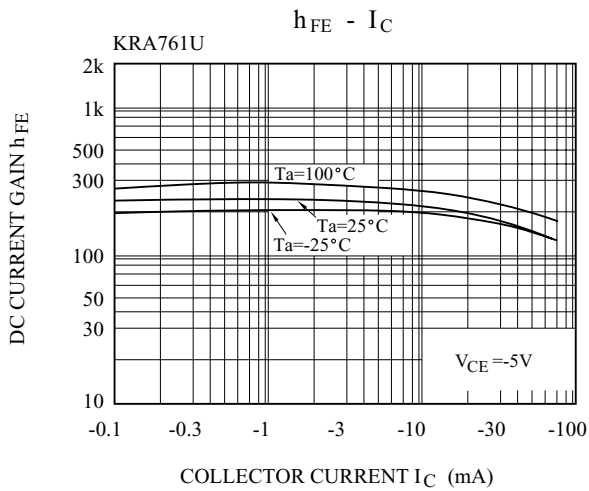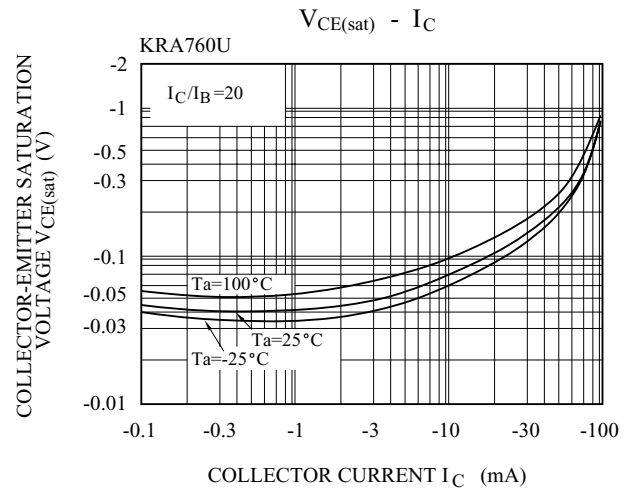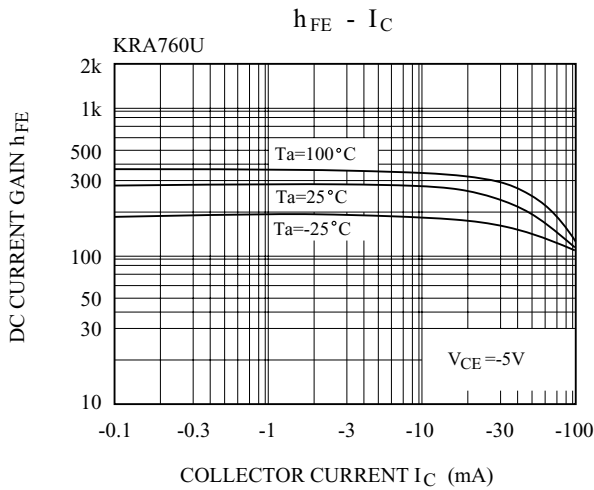

KRA760U~KRA764U

