

### PFC Circuit.



### FEATURES

- Ultra-Fast Recovery Time for High Efficiency.
- Low Forward Voltage Drop, High Current Capability, and Low Power Loss.
- Suffix **U** : Qualified to AEC-Q101.  
ex) U20A6CIC-U/**PU**

### APPLICATION

- Switching Power Supply.
- Home Appliances, Office Equipment.
- Telecommunication, Factory Automation.

### POLARITY

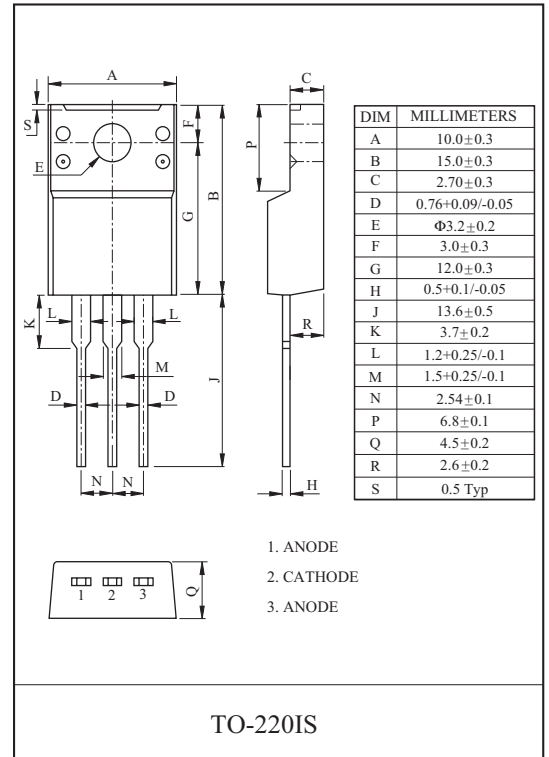

### MAXIMUM RATINGS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Maximum Reverse Voltage	$V_{RM}$	600	V
Average Output Rectified Current (Tc=94 °C) (Note1)	$I_O$	20	A
Peak One Cycle Surge Forward Current (Non-Repetitive, tp=10ms)	$I_{FSM}$	180	A
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55~150	

### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage	$V_{FM}$	$I_{FM}=10A$	-	1.5	2.0	V
Reverse Current	$I_{RM}$	$V_{RM}=600V$	-	-	30	μA
Reverse Recovery Time	$t_{rr}$	$I_F=1.0A, V_R=30V, di/dt=-50A/μs$	-	24	35	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	5.0	/W

# U20A6CIC

