

## THREE TERMINAL POSITIVE VOLTAGE REGULATORS 5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V, 20V, 24V.




### FEATURES

- Best Suited to a Power Supply for TTL and CMOS.
  - Built-in Overcurrent Protective Circuit.
  - Built-in Thermal Protective Circuit.
  - Max. Output Current 150mA ( $T_j=25^\circ\text{C}$ ).
  - Suffix U : Qualified to AEC-Q100.
- ex) KIA79L\*\*F-RTF/PU

### MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage	$V_{IN}$	-35	V
		-40	
Power Dissipation ( $T_c=25^\circ\text{C}$ )	$P_D$	800	mW
		500	
Operating Junction Temperature	$T_j$	-40 150	
Operating Temperature	$T_{opr}$	-40 85	
Storage temperature	$T_{stg}$	-55 150	

### EQUIVALENT CIRCUIT

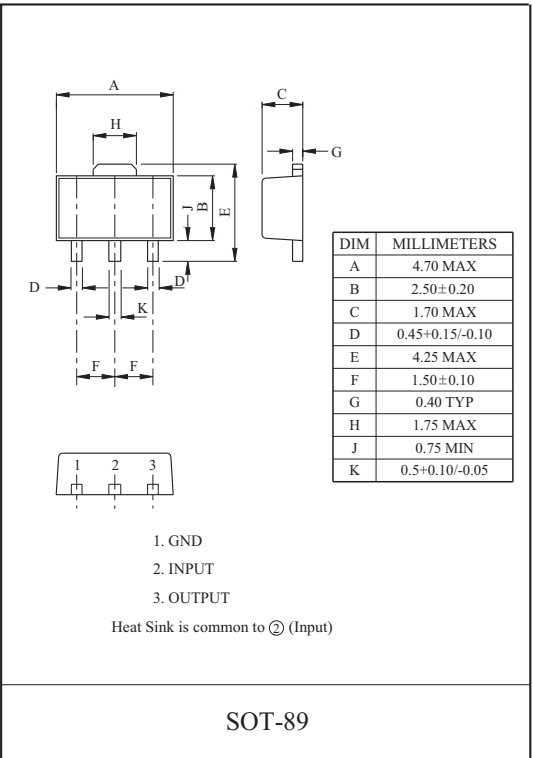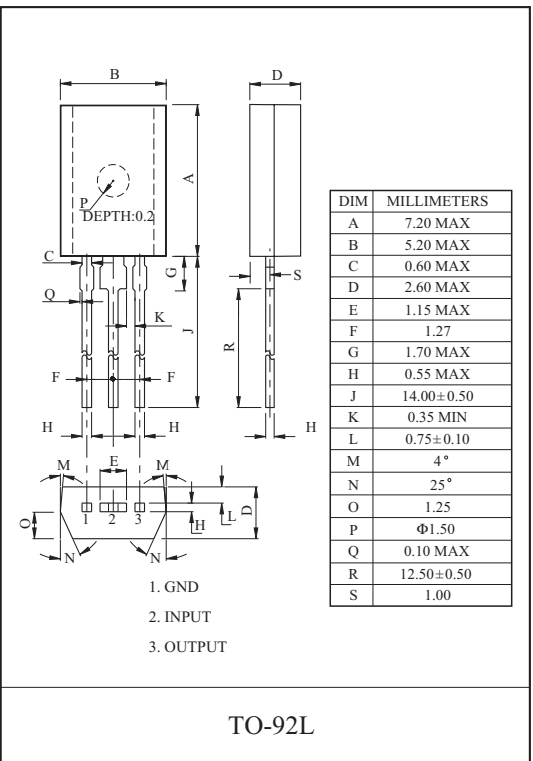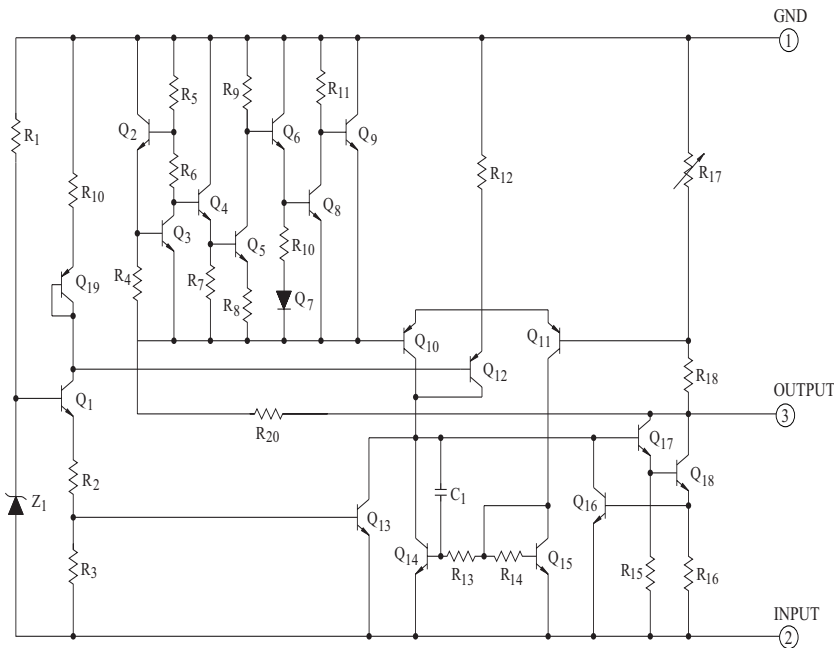

### Marking

Type No.	Marking	Type No.	Marking
KIA79L05F	9A	KIA79L09F	9D
KIA79L06F	9B	KIA79L10F	9E
KIA79L08F	9C	KIA79L12F	9F

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS

KIA79L05BP/F

(Unless otherwise specified,  $V_{IN}=-10V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0 < T_j < 125$  )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-5.2	-5.0	-4.8	V	
Input Regulation	Reg line	1	$T_j=25$	-20V $V_{IN}$ -7.0V	-	55	150	mV
				-20V $V_{IN}$ -8.0V	-	45	100	
Load Regulation	Reg load	1	$T_j=25$	1.0mA $I_{OUT}$ 100mA	-	11	60	mV
				1.0mA $I_{OUT}$ 40mA	-	5.0	30	
Output Voltage	$V_{OUT}$	1	-20V $V_{IN}$ -7.0V 1.0mA $I_{OUT}$ 40mA	-5.25	-	-4.75	V	
			$V_{IN}=-10V$ , 1.0mA $I_{OUT}$ 70mA	-5.25	-	-4.75		
Quiescent Current	$I_B$	1	$T_j=25$	-	3.1	6.0	mA	
			$T_j=125$	-	-	5.5		
Quiescent Current Change	$I_{BI}$	1	-20V $V_{IN}$ -8.0V	-	-	1.5	mA	
	$I_{BO}$		1.0mA $I_{OUT}$ 40mA	-	-	0.1		
Output Noise Voltage	$V_{NO}$	3	$T_a=25$ , 10Hz $f$ 100kHz	-	40	-	$\mu V_{rms}$	
Long Term Stability	$V_{OUT}/t$	1		-	12	-	mV/ 1.0kHrs	
Ripple Rejection Ratio	$R \cdot R$	2	-18V $V_{IN}$ -8.0V, $T_j=25$ , $f=120Hz$	41	49	-	dB	
Dropout Voltage	$ V_{IN}-V_{OUT} $	1	$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V	
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$	-	-0.6	-	mV/	

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS

KIA79L06BP/F

(Unless otherwise specified,  $V_{IN}=-11V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0 < T_j < 125$  )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-6.24	-6.0	-5.76	V	
Input Regulation	Reg line	1	$T_j=25$	$-21V < V_{IN} < -8.1V$	-	50	150	mV
				$-21V < V_{IN} < -9.0V$	-	45	110	
Load Regulation	Reg load	1	$T_j=25$	$1.0mA < I_{OUT} < 100mA$	-	12	70	mV
				$1.0mA < I_{OUT} < 40mA$	-	5.5	35	
Output Voltage	$V_{OUT}$	1		$-21V < V_{IN} < -8.1V$ $1.0mA < I_{OUT} < 40mA$	-6.3	-	-5.7	V
				$V_{IN}=-11V$ , $1.0mA < I_{OUT} < 70mA$	-6.3	-	-5.7	
Quiescent Current	$I_B$	1		$T_j=25$	-	3.1	6.0	mA
				$T_j=125$	-	-	5.5	
Quiescent Current Change	$I_{BI}$	1		$-20V < V_{IN} < -9.0V$	-	-	1.5	mA
	$I_{BO}$			$1.0mA < I_{OUT} < 40mA$	-	-	0.1	
Output Noise Voltage	$V_{NO}$	3		$T_a=25$ , $10Hz < f < 100kHz$	-	40	-	$\mu V_{rms}$
Long Term Stability	$V_{OUT}/t$	1			-	14	-	mV/ 1.0kHrs
Ripple Rejection Ratio	$R \cdot R$	2		$-19V < V_{IN} < -9.0V$ , $T_j=25$ , $f=120Hz$	39	47	-	dB
Dropout Voltage	$  \frac{V_{IN}-V_{OUT}}{V_{OUT}}  $	1		$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1		$I_{OUT}=5mA$	-	-0.7	-	mV/

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS

KIA79L08BP/F

(Unless otherwise specified,  $V_{IN}=-14V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33 F$ ,  $C_{OUT}=0.1 \mu F$ ,  $0 T_j 125$  )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-8.3	-8.0	-7.7	V	
Input Regulation	Reg line	1	$T_j=25$	-23V $V_{IN}$ -10.5V	-	20	175	mV
				-23V $V_{IN}$ -11V	-	12	125	
Load Regulation	Reg load	1	$T_j=25$	1.0mA $I_{OUT}$ 100mA	-	15	80	mV
				1.0mA $I_{OUT}$ 40mA	-	7.0	40	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-23V $V_{IN}$ -10.5V 1.0mA $I_{OUT}$ 40mA	-8.4	-	-7.6	V
				$V_{IN}=-14V$ , 1.0mA $I_{OUT}$ 70mA	-8.4	-	-7.6	
Quiescent Current	$I_B$	1	$T_j=25$		-	3.1	6.5	mA
				$T_j=125$	-	-	6.0	
Quiescent Current Change	$I_{BI}$	1	$T_j=25$	-23V $V_{IN}$ -11V	-	-	1.5	mA
	$I_{BO}$			1.0mA $I_{OUT}$ 40mA	-	-	0.1	
Output Noise Voltage	$V_{NO}$	3	$T_a=25$ , 10Hz $f$ 100kHz	-	60	-	$\mu V_{rms}$	
Long Term Stability	$V_{OUT}/t$	1		-	20	-	mV/ 1.0kHrs	
Ripple Rejection Ratio	$R \cdot R$	2	-23V $V_{IN}$ -12V, $T_j=25$ , $f=120Hz$	37	45	-	dB	
Dropout Voltage	$ V_{IN}-V_{OUT} $	1	$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V	
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$	-	-0.8	-	mV/	

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS

KIA79L09BP/F

(Unless otherwise specified,  $V_{IN}=-15V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0 < T_j < 125$  )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-9.36	-9.0	-8.64	V	
Input Regulation	Reg line	1	$T_j=25$	-24V $V_{IN}$ -11.4V	-	80	200	mV
				-24V $V_{IN}$ -12V	-	20	160	
Load Regulation	Reg load	1	$T_j=25$	1.0mA $I_{OUT}$ 100mA	-	17	90	mV
				1.0mA $I_{OUT}$ 40mA	-	8.0	45	
Output Voltage	$V_{OUT}$	1	-24V $V_{IN}$ -11.4V 1.0mA $I_{OUT}$ 40mA	-9.45	-	-8.55	V	
			$V_{IN}=-15V$ , 1.0mA $I_{OUT}$ 70mA	-9.45	-	-8.55		
Quiescent Current	$I_B$	1	$T_j=25$	-	3.2	6.5	mA	
			$T_j=125$	-	-	6.0		
Quiescent Current Change	$I_{BI}$	1	-24V $V_{IN}$ -12V	-	-	1.5	mA	
	$I_{BO}$		1.0mA $I_{OUT}$ 40mA	-	-	0.1		
Output Noise Voltage	$V_{NO}$	3	$T_a=25$ , 10Hz $f$ 100kHz	-	65	-	$\mu V_{rms}$	
Long Term Stability	$V_{OUT}/t$	1		-	21	-	mV/ 1.0kHrs	
Ripple Rejection Ratio	$R \cdot R$	2	-24V $V_{IN}$ -12V, $T_j=25$ , $f=120Hz$	36	44	-	dB	
Dropout Voltage	$ V_{IN}-V_{OUT} $	1	$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V	
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$	-	-0.85	-	mV/	

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS

KIA79L10BP/F

(Unless otherwise specified,  $V_{IN}=-16V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0 \leq T_j \leq 125$  )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-10.4	-10.0	-9.6	V	
Input Regulation	Reg line	1	$T_j=25$	-25V $V_{IN}$ -12.5V	-	80	230	mV
				-25V $V_{IN}$ -13V	-	30	170	
Load Regulation	Reg load	1	$T_j=25$	1.0mA $I_{OUT}$ 100mA	-	18	90	mV
				1.0mA $I_{OUT}$ 40mA	-	8.5	45	
Output Voltage	$V_{OUT}$	1	-25V $V_{IN}$ -12.5V 1.0mA $I_{OUT}$ 40mA	-10.5	-	-9.5	V	
			$V_{IN}=-16V$ , 1.0mA $I_{OUT}$ 70mA	-10.5	-	-9.5		
Quiescent Current	$I_B$	1	$T_j=25$	-	3.2	6.5	mA	
			$T_j=125$	-	-	6.0		
Quiescent Current Change	$I_{BI}$	1	-25V $V_{IN}$ -13V	-	-	1.5	mA	
	$I_{BO}$		1.0mA $I_{OUT}$ 40mA	-	-	0.1		
Output Noise Voltage	$V_{NO}$	3	$T_a=25$ , 10Hz $f$ 100kHz	-	70	-	$\mu V_{rms}$	
Long Term Stability	$V_{OUT}/t$	1		-	22	-	mV/ 1.0kHrs	
Ripple Rejection Ratio	$R \cdot R$	2	-24V $V_{IN}$ -13V, $T_j=25$ , $f=120Hz$	36	43	-	dB	
Dropout Voltage	$ V_{IN}-V_{OUT} $	1	$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V	
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$	-	-0.9	-	mV/	

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS

KIA79L12BP/F

(Unless otherwise specified,  $V_{IN}=-19V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0 \leq T_j \leq 125$  )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-12.5	-12.0	-11.5	V	
Input Regulation	Reg line	1	$T_j=25$	$-27V \leq V_{IN} \leq -14.5V$	-	120	250	mV
				$-27V \leq V_{IN} \leq -16V$	-	100	200	
Load Regulation	Reg load	1	$T_j=25$	$1.0mA \leq I_{OUT} \leq 100mA$	-	20	100	mV
				$1.0mA \leq I_{OUT} \leq 40mA$	-	10	50	
Output Voltage	$V_{OUT}$	1	$-27V \leq V_{IN} \leq -14.5V$ $1.0mA \leq I_{OUT} \leq 40mA$	-12.6	-	-11.4	V	
			$V_{IN}=-19V$ , $1.0mA \leq I_{OUT} \leq 70mA$	-12.6	-	-11.4		
Quiescent Current	$I_B$	1	$T_j=25$	-	3.2	6.5	mA	
			$T_j=125$	-	-	6.0		
Quiescent Current Change	$I_{BI}$	1	$-27V \leq V_{IN} \leq -16V$	-	-	1.5	mA	
	$I_{BO}$		$1.0mA \leq I_{OUT} \leq 40mA$	-	-	0.1		
Output Noise Voltage	$V_{NO}$	3	$T_a=25$ , 10Hz $\leq f \leq$ 100kHz	-	80	-	$\mu V_{rms}$	
Long Term Stability	$V_{OUT}/t$	1		-	24	-	mV/ 1.0kHrs	
Ripple Rejection Ratio	$R \cdot R$	2	$-25V \leq V_{IN} \leq -15V$ , $T_j=25$ , $f=120Hz$	37	42	-	dB	
Dropout Voltage	$ V_{IN}-V_{OUT} $	1	$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V	
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$	-	-1.0	-	mV/	

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS

KIA79L15BP/F

(Unless otherwise specified,  $V_{IN}=-23V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0 \leq T_j \leq 125$  )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-15.6	-15.0	-14.4	V	
Input Regulation	Reg line	1	$T_j=25$	$-30V \leq V_{IN} \leq -17.5V$	-	130	300	mV
				$-30V \leq V_{IN} \leq -20V$	-	110	250	
Load Regulation	Reg load	1	$T_j=25$	$1.0mA \leq I_{OUT} \leq 100mA$	-	25	150	mV
				$1.0mA \leq I_{OUT} \leq 40mA$	-	12	75	
Output Voltage	$V_{OUT}$	1	$T_j=25$	$-30V \leq V_{IN} \leq -17.5V$ $1.0mA \leq I_{OUT} \leq 40mA$	-15.75	-	-14.25	V
				$V_{IN}=-23V$ , $1.0mA \leq I_{OUT} \leq 70mA$	-15.75	-	-14.25	
Quiescent Current	$I_B$	1	$T_j=25$		-	3.3	6.5	mA
				$T_j=125$	-	-	6.0	
Quiescent Current Change	$I_{BI}$	1	$T_j=25$	$-30V \leq V_{IN} \leq -20V$	-	-	1.5	mA
	$I_{BO}$			$1.0mA \leq I_{OUT} \leq 40mA$	-	-	0.1	
Output Noise Voltage	$V_{NO}$	3	$T_a=25$ , $10Hz \leq f \leq 100kHz$	-	90	-	$\mu V_{rms}$	
Long Term Stability	$V_{OUT}/t$	1		-	30	-	mV/ 1.0kHrs	
Ripple Rejection Ratio	$R \cdot R$	2	$-28.5V \leq V_{IN} \leq -18.5V$ , $T_j=25$ , $f=120Hz$	34	39	-	dB	
Dropout Voltage	$ V_{IN}-V_{OUT} $	1	$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V	
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$	-	-1.3	-	mV/	

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS

KIA79L18BP/F

(Unless otherwise specified,  $V_{IN}=-27V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0 \leq T_j \leq 125$  )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-18.7	-18.0	-17.3	V	
Input Regulation	Reg line	1	$T_j=25$	-33V $V_{IN}$ -20.7V	-	32	325	mV
				-33V $V_{IN}$ -21V	-	27	275	
Load Regulation	Reg load	1	$T_j=25$	1.0mA $I_{OUT}$ 100mA	-	30	170	mV
				1.0mA $I_{OUT}$ 40mA	-	15	75	
Output Voltage	$V_{OUT}$	1	-33V $V_{IN}$ -20.9V 1.0mA $I_{OUT}$ 40mA	-18.9	-	-17.1	V	
			$V_{IN}=-27V$ , 1.0mA $I_{OUT}$ 70mA	-18.9	-	-17.1		
Quiescent Current	$I_B$	1	$T_j=25$	-	3.3	6.5	mA	
			$T_j=125$	-	-	6.0		
Quiescent Current Change	$I_{BI}$	1	-33V $V_{IN}$ -21V	-	-	1.5	mA	
	$I_{BO}$		1.0mA $I_{OUT}$ 40mA	-	-	0.1		
Output Noise Voltage	$V_{NO}$	3	$T_a=25$ , 10Hz $f$ 100kHz	-	150	-	$\mu V_{rms}$	
Long Term Stability	$V_{OUT}/t$	1		-	45	-	mV/ 1.0kHrs	
Ripple Rejection Ratio	$R \cdot R$	2	-33V $V_{IN}$ -23V, $T_j=25$ , $f=120Hz$	33	48	-	dB	
Dropout Voltage	$ V_{IN}-V_{OUT} $	1	$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V	
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$	-	-1.5	-	mV/	

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS

KIA79L20BP/F

(Unless otherwise specified,  $V_{IN}=-29V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0 \leq T_j \leq 125$  )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-20.8	-20.0	-19.2	V	
Input Regulation	Reg line	1	$T_j=25$	$-35V \leq V_{IN} \leq -23.5V$	-	33	330	mV
				$-35V \leq V_{IN} \leq -24V$	-	28	285	
Load Regulation	Reg load	1	$T_j=25$	$1.0mA \leq I_{OUT} \leq 100mA$	-	33	180	mV
				$1.0mA \leq I_{OUT} \leq 40mA$	-	17	90	
Output Voltage	$V_{OUT}$	1	$-35V \leq V_{IN} \leq -23.5V$ $1.0mA \leq I_{OUT} \leq 40mA$	-21.0	-	-19.0	V	
			$V_{IN}=-29V$ , $1.0mA \leq I_{OUT} \leq 70mA$	-21.0	-	-19.0		
Quiescent Current	$I_B$	1	$T_j=25$	-	3.3	6.5	mA	
			$T_j=125$	-	-	6.0		
Quiescent Current Change	$I_{BI}$	1	$-35V \leq V_{IN} \leq -24V$	-	-	1.5	mA	
	$I_{BO}$		$1.0mA \leq I_{OUT} \leq 40mA$	-	-	0.1		
Output Noise Voltage	$V_{NO}$	3	$T_a=25$ , 10Hz $\leq f \leq$ 100kHz	-	170	-	$\mu V_{rms}$	
Long Term Stability	$V_{OUT}/t$	1		-	49	-	mV/ 1.0kHrs	
Ripple Rejection Ratio	$R \cdot R$	2	$-35V \leq V_{IN} \leq -27V$ , $T_j=25$ , $f=120Hz$	31	37	-	dB	
Dropout Voltage	$ V_{IN}-V_{OUT} $	1	$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V	
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$	-	-1.7	-	mV/	

# KIA79L05BP/F~KIA79L24BP/F

## ELECTRICAL CHARACTERISTICS


KIA79L24BP/F

(Unless otherwise specified,  $V_{IN}=-33V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0 \leq T_j \leq 125$  )


CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j=25$	-25.0	-24.0	-23.0	V	
Input Regulation	Reg line	1	$T_j=25$	-38V $V_{IN}$ -27V	-	35	350	mV
				-38V $V_{IN}$ -28V	-	30	300	
Load Regulation	Reg load	1	$T_j=25$	1.0mA $I_{OUT}$ 100mA	-	40	200	mV
				1.0mA $I_{OUT}$ 40mA	-	20	100	
Output Voltage	$V_{OUT}$	1	-38V $V_{IN}$ -27V 1.0mA $I_{OUT}$ 40mA	-25.2	-	-22.8	V	
			$V_{IN}=-33V$ , 1.0mA $I_{OUT}$ 70mA	-25.2	-	-22.8		
Quiescent Current	$I_B$	1	$T_j=25$	-	3.5	6.5	mA	
			$T_j=125$	-	-	6.0		
Quiescent Current Change	$I_{BI}$	1	-38V $V_{IN}$ -28V	-	-	1.5	mA	
	$I_{BO}$		1.0mA $I_{OUT}$ 40mA	-	-	0.1		
Output Noise Voltage	$V_{NO}$	3	$T_a=25$ , 10Hz $f$ 100kHz	-	200	-	$\mu V_{rms}$	
Long Term Stability	$V_{OUT}/t$	1		-	56	-	mV/ 1.0kHrs	
Ripple Rejection Ratio	$R \cdot R$	2	-35V $V_{IN}$ -29V, $T_j=25$ , $f=120Hz$	31	47	-	dB	
Dropout Voltage	$ V_{IN}-V_{OUT} $	1	$T_j=25$ , $I_{OUT}=40mA$	-	1.7	-	V	
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$	-	-2.0	-	mV/	

# KIA79L05BP/F~KIA79L24BP/F


TEST CIRCUIT 1

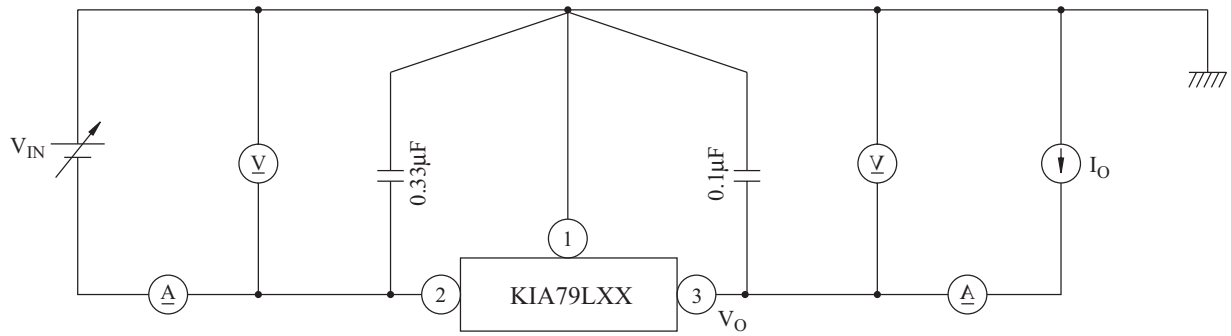






TEST CIRCUIT 2

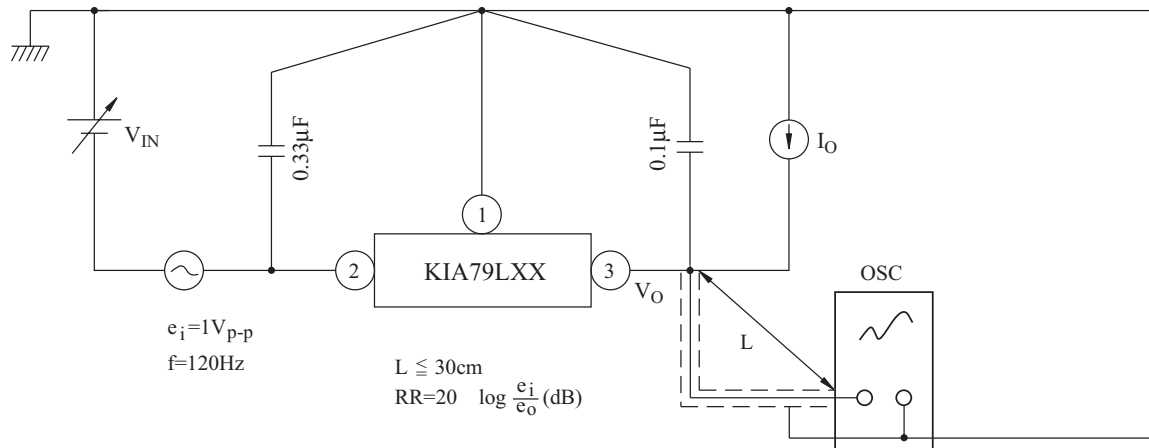

TEST CIRCUIT 3

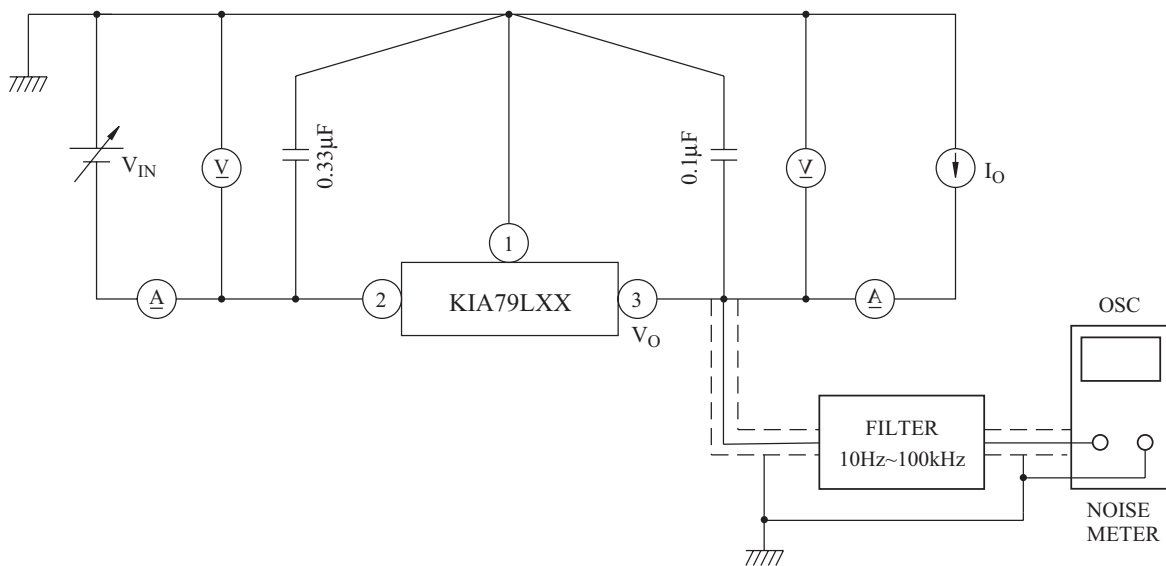

# KIA79L05BP/F~KIA79L24BP/F

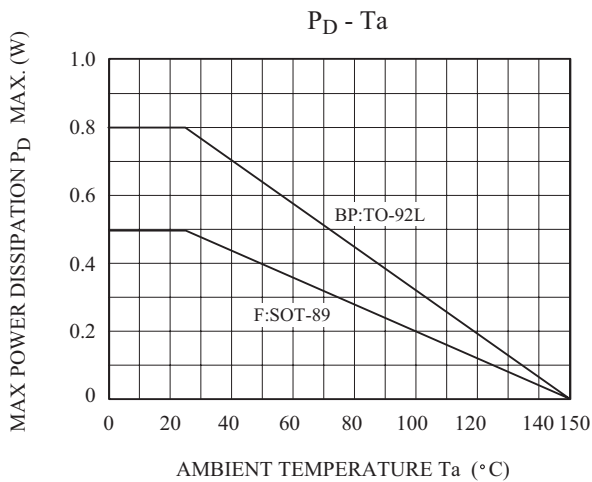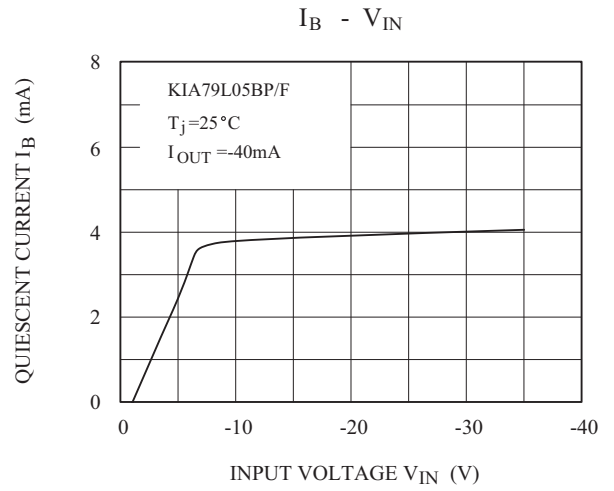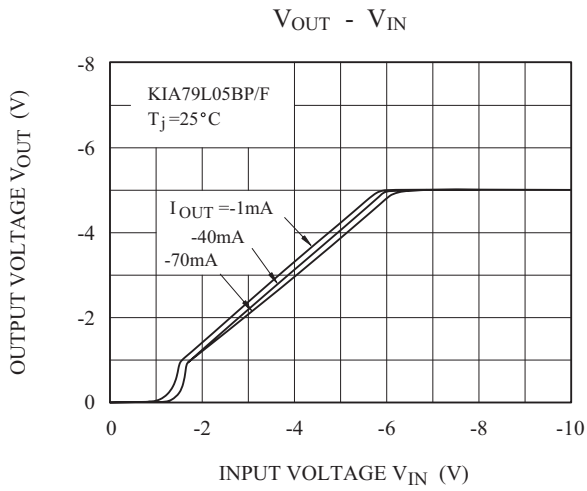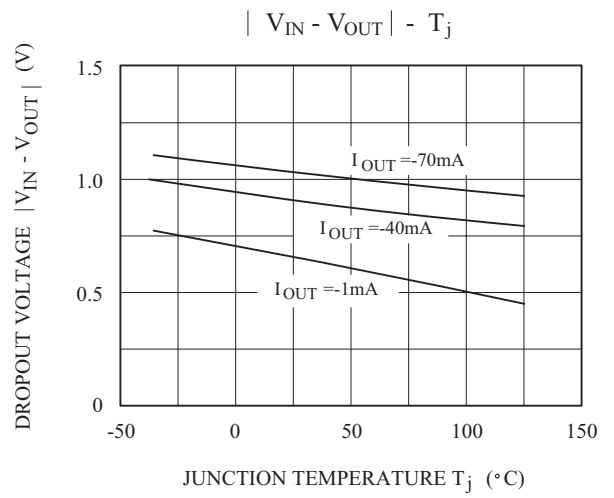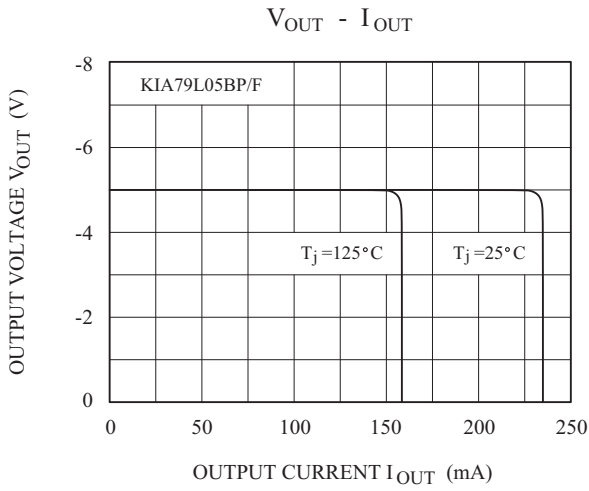

# KIA79L05BP/F~KIA79L24BP/F

## PRECAUTIONS FOR USE

### SOLDERING

#### Flat Package (SOT-89 Package)

Elements mounting styles of electronic devices are gaining in further diversification over recent years, and needs for components are all the more expanding in varieties. Especially, surface mounting is steadily penetrating into industrial segments as a world-wide popular technical trend. Although exposure to high temperature is inevitable during soldering we recommend limiting the soldering temperature to low levels as shown in figure for the sake of retaining inherent excellent reliability.

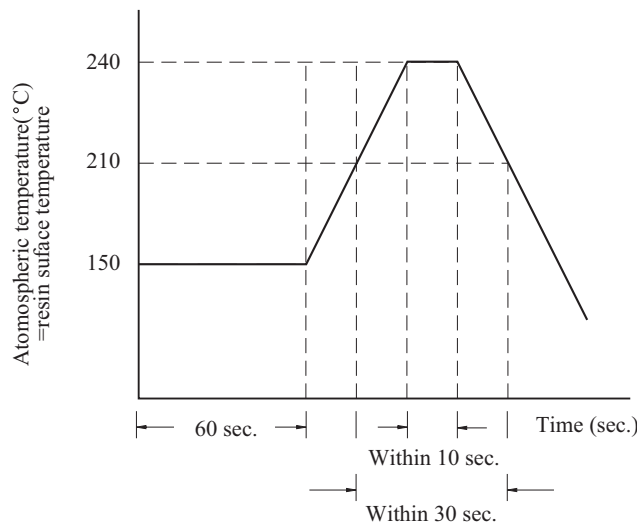


Fig 1

#### (a) When employing solder reflow method

Atmospheric temperature around resin surfaces must be less than 240 °C, not exceeding the time length of 10 sec.

Recommend temperature profile

Precautions on heating method

When resin is kept exposed to high temperature for a long time, device reliability may be marred.

Therefore, it is essential to complete soldering in the shortest time possible to prevent temperature of resin from rising.

#### (b) When employing halogen lamps or infrared-ray heaters

When halogen lamps or infrared-ray heaters are used, avoid direct irradiation onto resin surfaces ; such devices cause extensive localized temperature rise.

Please keep a reflow solder operating when SOT-89 package's soldering.