

RELAY DRIVERS, LAMP DRIVERS,  
MOTOR DRIVERS AND STROBES APPLICATION.

### FEATURES

- Adoption of MBIT Processes.
- High Current Capacitance.
- Low Collector-to-Emitter Saturation Voltage.
- High Speed Switching.
- Ultrasmall-Sized Package permitting applied sets to be made small and slim.
- High Allowable Power Dissipation.
- Complementary to KTC3535T
- Suffix U : Qualified to AEC-Q101.  
ex) KTA1535T-RTK/PWU



### MAXIMUM RATING (Ta=25 )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CB0}$	-20	V
Collector-Emitter Voltage	$V_{CEO}$	-20	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current	DC	$I_C$	A
	Pulse	$I_{CP}$	
Base Current	$I_B$	600	mA
Collector Power Dissipation	$P_C^*$	0.9	W
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	


\* Package mounted on a ceramic board (600mm<sup>2</sup> × 0.8mm)

### ELECTRICAL CHARACTERISTICS (Ta=25 )







CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=-12V, I_E=0$	-	-	-0.1	μA
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=-4V, I_C=0$	-	-	-0.1	μA
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=-10\mu A, I_E=0$	-20	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-1mA, I_B=0$	-20	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-5	-	-	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-1.5A, I_B=-30mA$	-	-130	-165	mV
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=-1.5A, I_B=-30mA$	-	-0.85	-1.2	V
DC Current Gain	$h_{FE}$	$V_{CE}=-2V, I_C=-500mA$	200	-	560	
Transition Frequency	$f_T$	$V_{CE}=-2V, I_C=-500mA$	-	160	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=-10V, f=1MHz$	-	45	-	pF
Switching Time	Turn-On Time	$t_{on}$	-	30	-	nS
	Storage Time	$t_{stg}$	-	90	-	
	Fall Time	$t_f$	-	10	-	

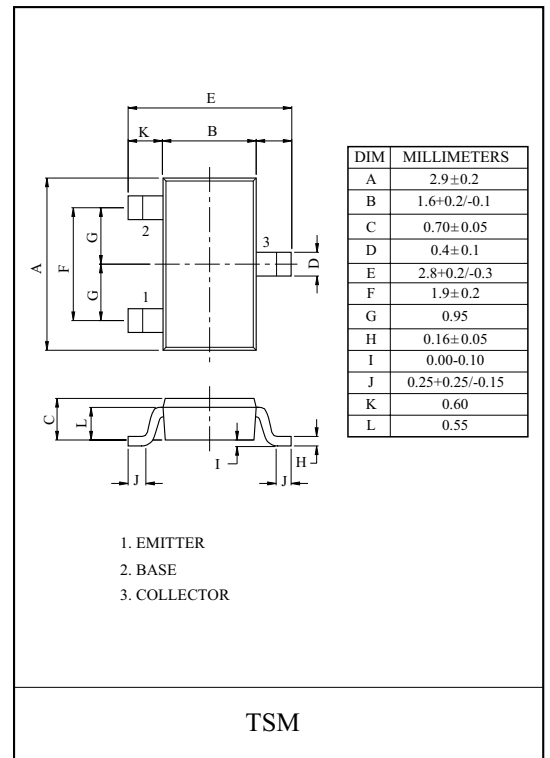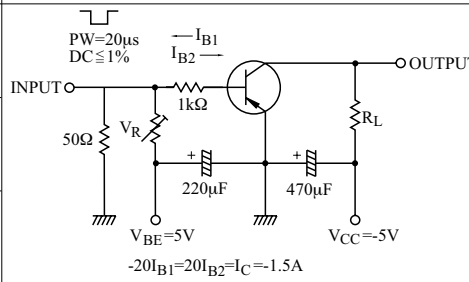

### Marking

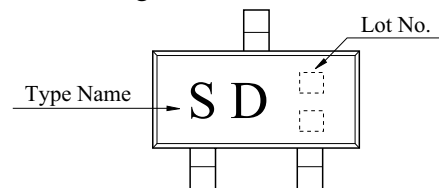


# KTA1535T

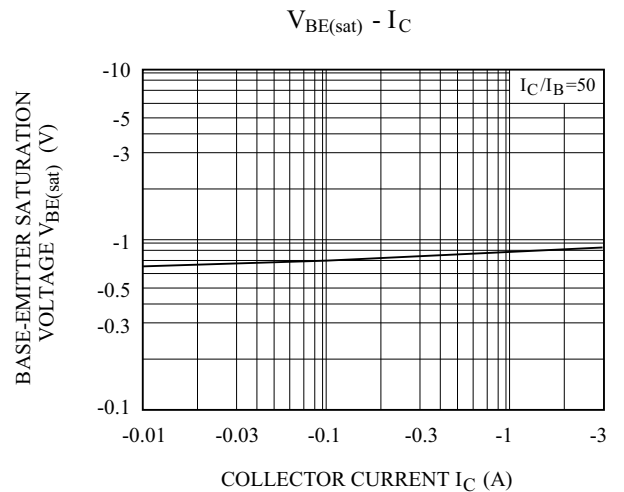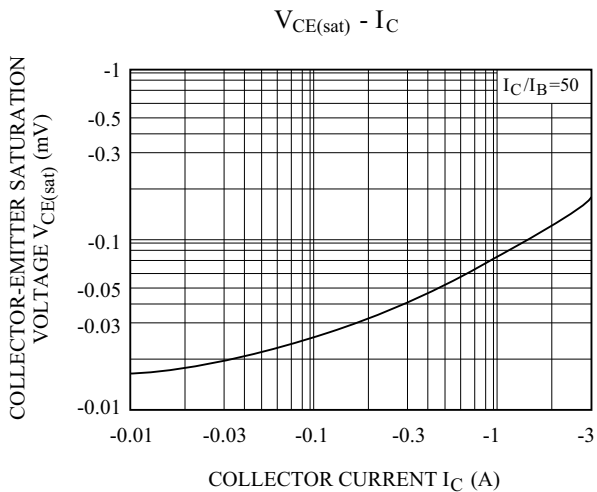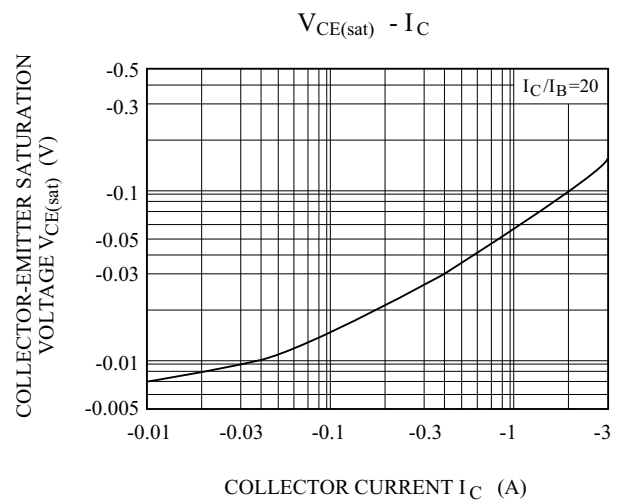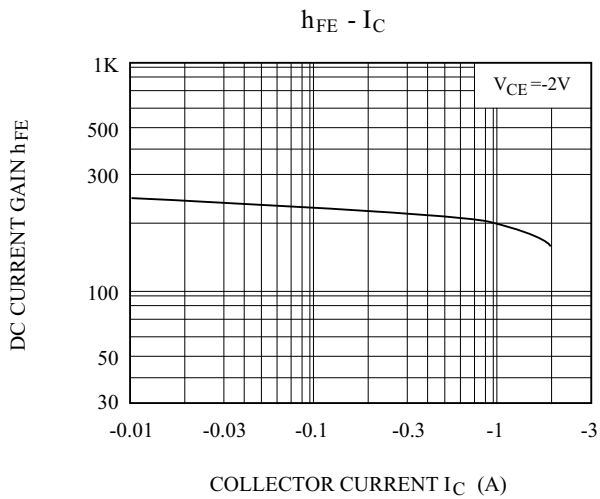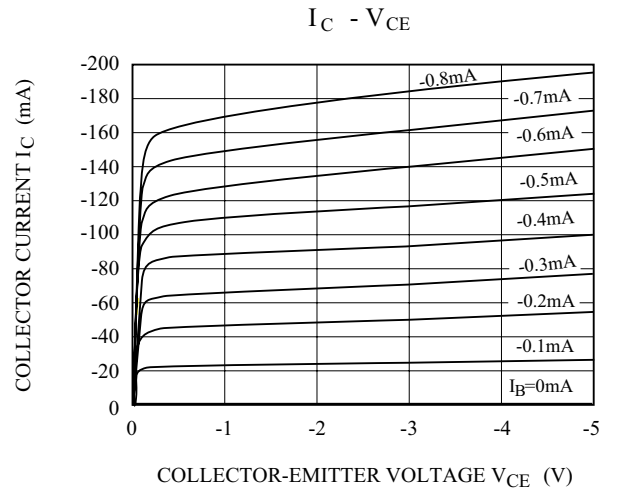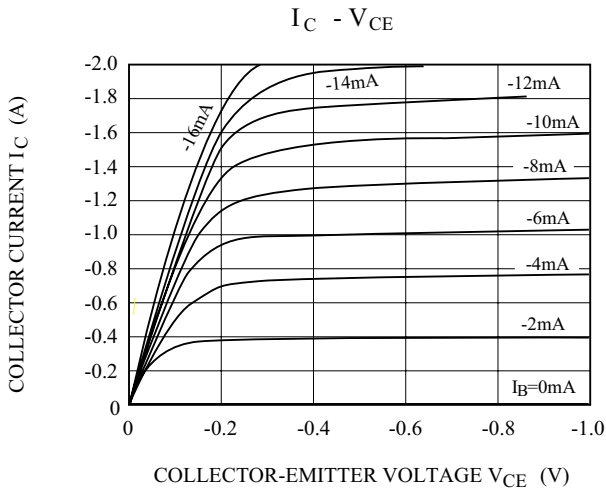


# KTA1535T


$I_C - V_{BE}$

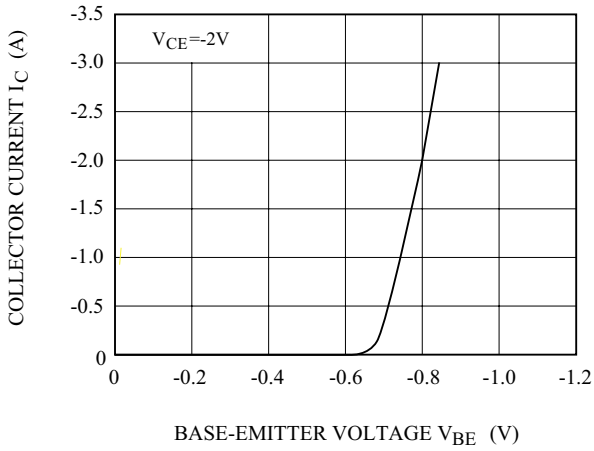


$f_T - I_C$

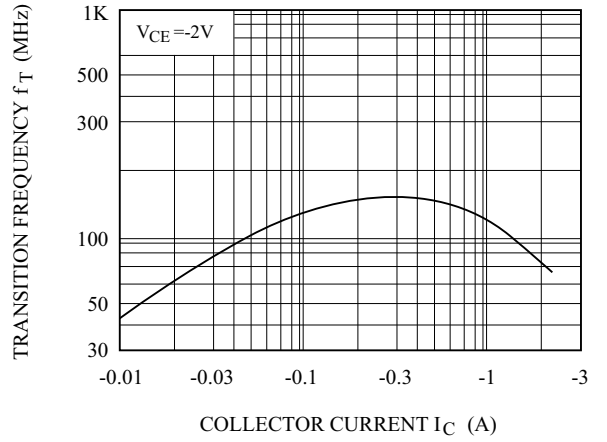

$C_{ob} - V_{CB}$

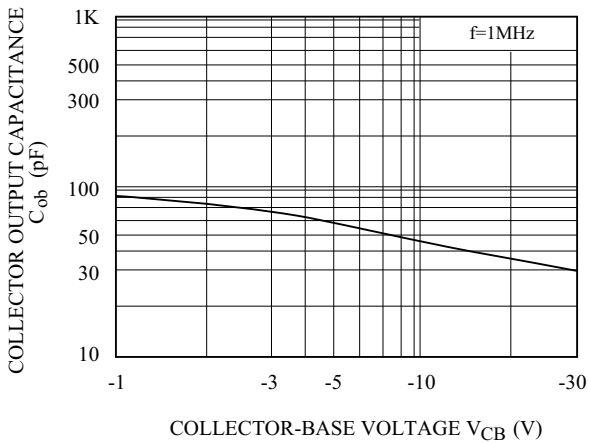

SAFE OPERATING AREA

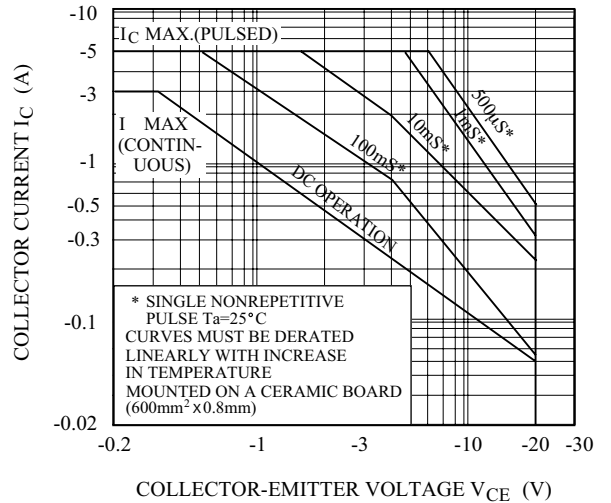

$P_c - T_a$

