

**SWITCHING MODE POWER SUPPLY APPLICATION.  
CONVERTER & CHOPPER APPLICATION.**

**FEATURES**

- Average Output Rectified Current  
:  $I_O=40A$ .
- Repetitive Peak Reverse Voltage  
:  $V_{RRM}=150V$ .
- Low Forward Voltage.
- Low Reverse Current.
- Molding Compound Flammability Rating : UL 94V-0
- Pb-Free, Halogen-Free, RoHs Compliant

**MAXIMUM RATING (Ta=25 )**



CHARACTERISTIC	SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	$V_{RRM}$	150	V
Average Output Rectified Current (Tc=110 ) (Note)	$I_O$	40	A
Peak One Cycle Surge Forward Current (Non-Repetitive 60Hz)	$I_{FSM}$	200	A
Junction Temperature	$T_j$	-40 150	
Storage Temperature Range	$T_{stg}$	-55 150	

Note : average forward current of centertap full wave connection.

**ELECTRICAL CHARACTERISTICS (Ta=25 )**

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage (Note)	$V_{FM}$	$I_{FM}=1A$	-	0.40	-	V
		$I_{FM}=10A$	-	0.67	-	
		$I_{FM}=20A$	-	0.92	1.00	
Repetitive Peak Reverse Current (Note)	$I_{RRM}$	$V_{RRM}=150V$	-	10	100	$\mu A$
Total Capacitance (Note)	$C_T$	$V_R=0V, f=1MHz$	-	2.0	-	nF
Thermal Resistance (Note)	$R_{th(j-c)}$	Junction to Case	-	-	4	/W

Note : A value of one cell

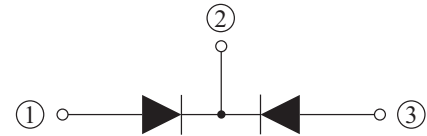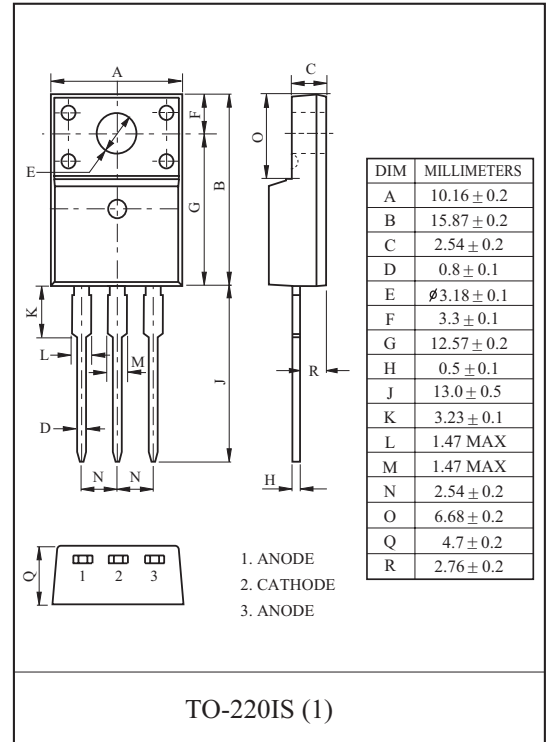

# TMBRF40150CT

