


SWITCHING TYPE POWER SUPPLY APPLICATION.  
CONVERTER & CHOPPER APPLICATION.

### FEATURES



- Average Output Rectified Current  
:  $I_O=6A$ .
- Repetitive Peak Reverse Voltage  
:  $V_{RRM}=60V$ .
- Suffix U : Qualified to AEC-Q101  
ex ) MBRD6U60CT-RTF/HU

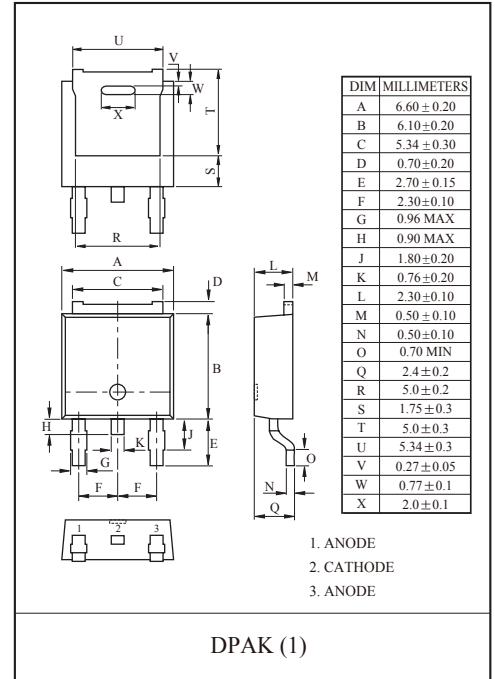

### MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	$V_{RRM}$	60	V
Average Output Rectified Current (Tc=114°C) (Note)	$I_O$	6	A
Peak One Cycle Surge Forward Current (Non-Repetitive 60Hz)	$I_{FSM}$	90	A
Junction Temperature	$T_j$	-55 ~ 150	°C
Storage Temperature Range	$T_{stg}$	-55 ~ 150	°C

Note : Average forward current of centertap full wave connection.

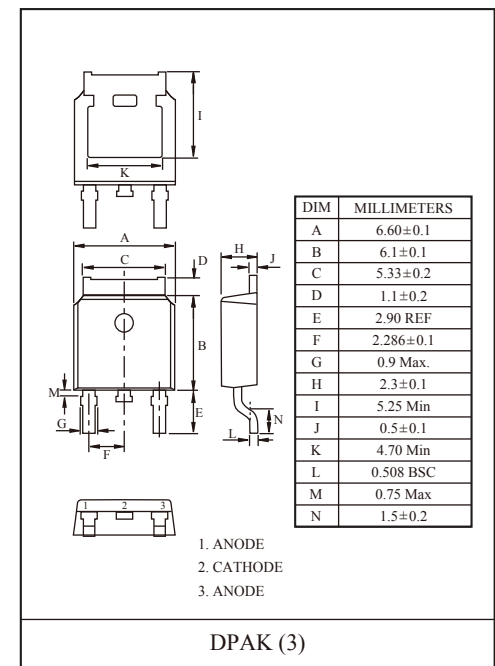


### ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage (Note)	$V_{FM}$	$I_{FM}=3A$	-	-	0.65	V
Repetitive Peak Reverse Current (Note)	$I_{RRM}$	$V_{RRM}=60V$	-	-	50	μA
Thermal Resistance (Note)	$R_{th(j-c)}$	Juction to Case	-	-	6.0	°C /W
Total Capacitance (Note)	$C_T$	$V_{RRM}=0V, f=1MHz$	-	500	-	pF


Note : A value of one cell

# MBRD6U60CT

$I_F - V_F$

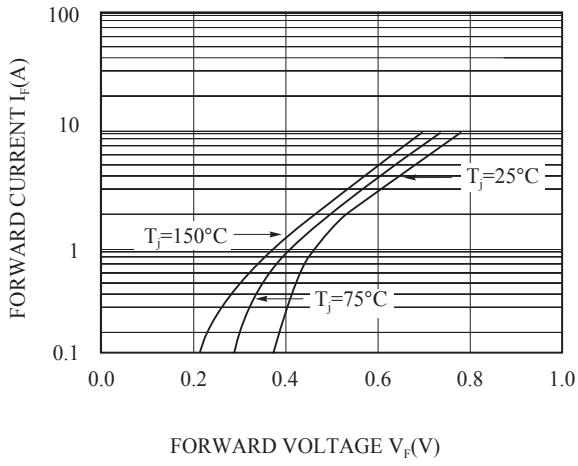

$I_R - V_R$

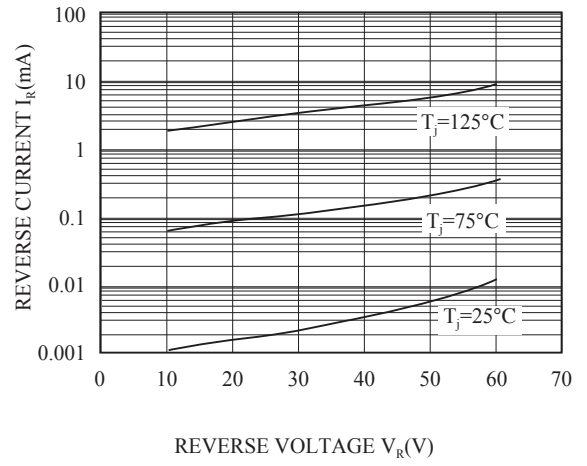

$C_T - V_R$

