

## General Description

This Trench MOSFET has better characteristics, such as fast switching time, low on resistance, low gate charge and excellent avalanche characteristics. It is mainly suitable for LED Lighting and DC/DC Converters.

## FEATURES

- $V_{DSS(Min.)} = 100V$ ,  $I_D = 1.7A$
- Drain-Source ON Resistance :  $R_{DS(ON)} = 0.36$  (max) @  $V_{GS} = 10V$
- $Q_g(\text{typ.}) = 4.5nC$

## ORDERING INFORMATION




FULL NAME	PACKAGE	SUFFIX
KU3600N10WZ-RTK/HD	SOT-223	-
KU3600N10WZ-RTK/HDH	SOT-223(1)	Added code "H" to SOT-223(1)

## MAXIMUM RATING (Tc=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Drain-Source Voltage	$V_{DSS}$	100	V
Gate-Source Voltage	$V_{GSS}$	$\pm 18$	V
Drain Current	@ $T_C = 25$	1.7*	A
	@ $T_C = 100$	1.0*	
	Pulsed (Note1)	$I_{DP}$	
Single Pulsed Avalanche Energy (Note 2)	$E_{AS}$	12.4	mJ
Repetitive Avalanche Energy (Note 1)	$E_{AR}$	0.1	mJ
Peak Diode Recovery dv/dt (Note 3)	dv/dt	4.5	V/ns
Drain Power Dissipation	$T_A = 25$	2.0*	W
	Derate above 25	0.016	W/°C
Maximum Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 ~ 150	
<b>Thermal Characteristics</b>			
Thermal Resistance, Junction-to-Ambient	$R_{thJA}$	62.5*	/W

\* : Surface Mounted on FR4 Board (50mm x 50mm, 1.0t)

## PIN CONNECTION

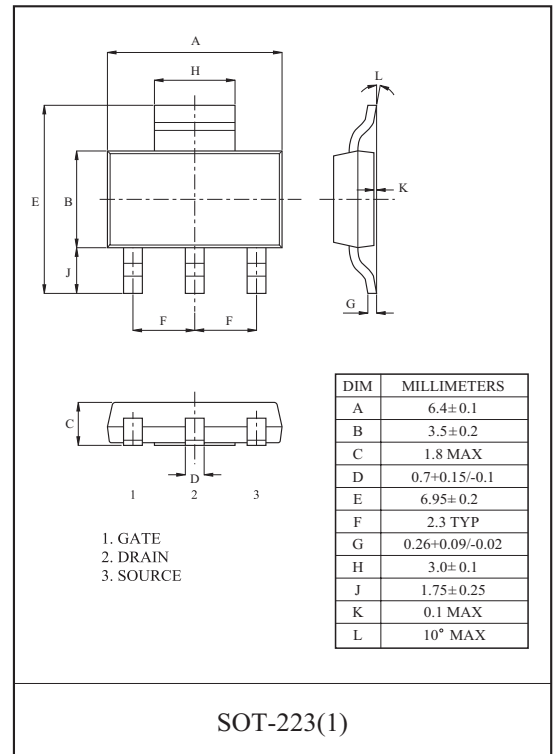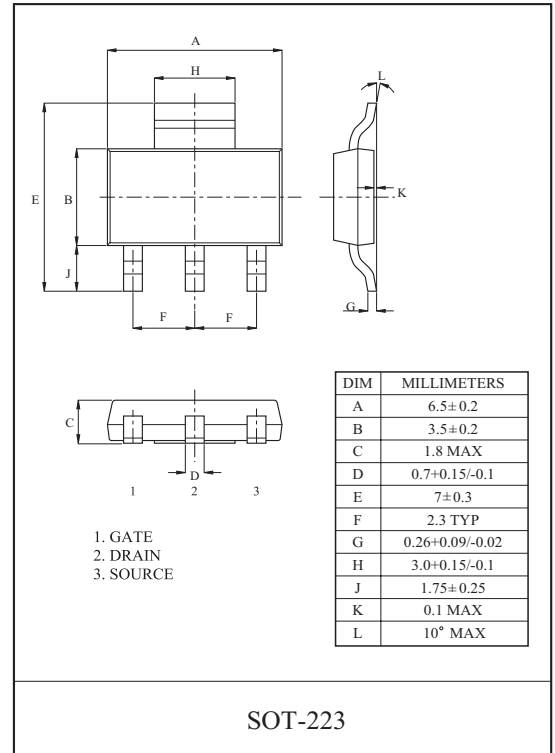

# KU3600N10WZ

## ELECTRICAL CHARACTERISTICS (Tc=25 )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>Static</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$I_D=250\ \mu A$ , $V_{GS}=0V$	100	-	-	V
Breakdown Voltage Temperature Coefficient	$BV_{DSS}/T_j$	$I_D=250\ \mu A$ , Referenced to 25	-	0.1	-	V/
Drain Cut-off Current	$I_{DSS}$	$V_{DS}=100V$ , $V_{GS}=0V$ ,	-	-	10	$\mu A$
Gate Threshold Voltage	$V_{th}$	$V_{DS}=V_{GS}$ , $I_D=250\ \mu A$	1.0	-	2.5	V
Gate Leakage Current	$I_{GSS}$	$V_{GS}=\pm 16V$ , $V_{DS}=0V$	-	-	$\pm 10$	$\mu A$
Drain-Source ON Resistance	$R_{DS(ON)}$	$V_{GS}=10V$ , $I_D=0.8A$	-	0.30	0.36	
		$V_{GS}=4.5V$ , $I_D=0.8A$		-	0.44	
<b>Dynamic</b>						
Total Gate Charge	$Q_g$	$V_{DS}=50V$ , $I_D=1.7A$ $V_{GS}=10V$ (Note4,5)	-	4.5	5.8	nC
Gate-Source Charge	$Q_{gs}$		-	0.7	-	
Gate-Drain Charge	$Q_{gd}$		-	1.5	-	
Turn-on Delay time	$t_{d(on)}$	$V_{DD}=50V$ , $I_D=1.7A$ $R_G=6$ (Note4,5) $V_{GS}=10V$	-	10	-	ns
Turn-on Rise time	$t_r$		-	5	-	
Turn-off Delay time	$t_{d(off)}$		-	35	-	
Turn-off Fall time	$t_f$		-	6	-	
Input Capacitance	$C_{iss}$	$V_{DS}=25V$ , $V_{GS}=0V$ , $f=1.0MHz$	-	210	300	pF
Output Capacitance	$C_{oss}$		-	30	-	
Reverse Transfer Capacitance	$C_{rss}$		-	13	-	
<b>Source-Drain Diode Ratings</b>						
Continuous Source Current	$I_S$	$V_{GS}<V_{th}$	-	-	1	A
Pulsed Source Current	$I_{SP}$		-	-	4	
Diode Forward Voltage	$V_{SD}$	$I_S=1A$ , $V_{GS}=0V$	-	-	1.4	V
Reverse Recovery Time	$t_{rr}$	$I_S=1.7A$ , $V_{GS}=0V$ , $dI_S/dt=100A/\mu s$	-	30	-	ns
Reverse Recovery Charge	$Q_{rr}$		-	40	-	nC

Note 1) Repetivity rating : Pulse width limited by junction temperature.


Note 2)  $L = 5mH$ ,  $I_S=1.7A$ ,  $V_{DD}=50V$ ,  $R_G = 25$  , Starting  $T_j = 25$  .

Note 3)  $I_S = 1.7A$ ,  $dI/dt = 100A/\mu s$ ,  $V_{DD} = BV_{DSS}$ , Starting  $T_j = 25$  .

Note 4) Pulse Test : Pulse width  $300\mu s$ , Duty Cycle  $2\%$ .

Note 5) Essentially independent of operating temperature.

### Marking



① PRODUCT NAME

② LOT NO

# KU3600N10WZ

Fig1.  $V_{DS} - I_D$

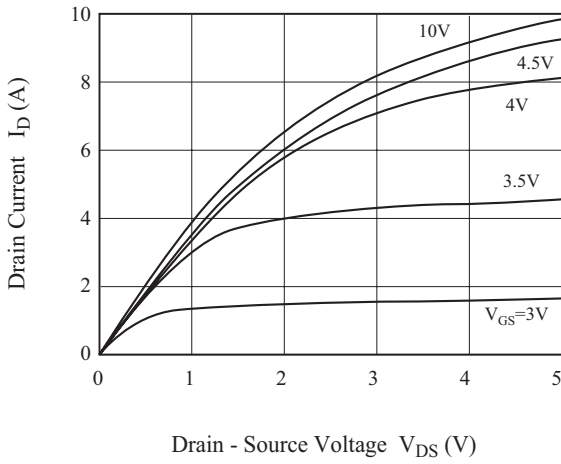


Fig2.  $R_{DS(ON)} - I_D$

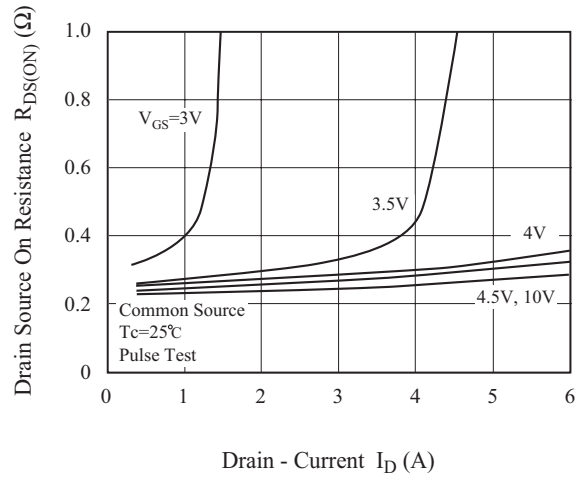


Fig3.  $I_D - V_{GS}$

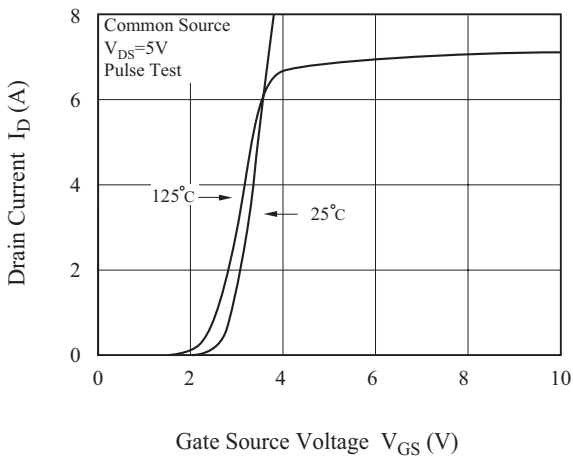


Fig4.  $R_{DS(ON)} - T_j$

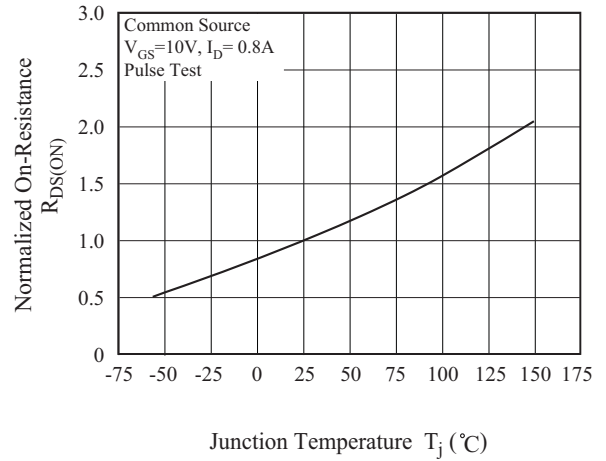


Fig5.  $V_{th} - T_j$

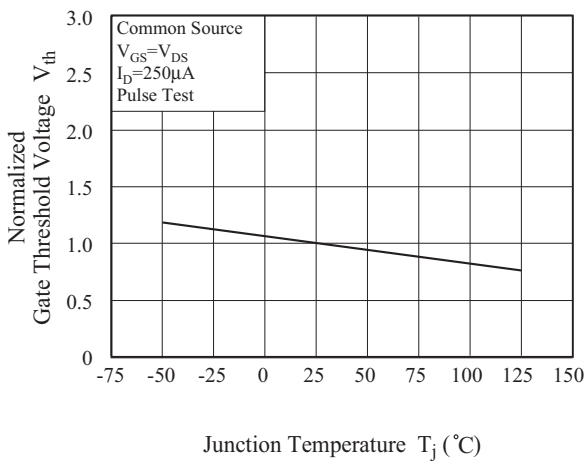


Fig6.  $I_S - V_{SDF}$

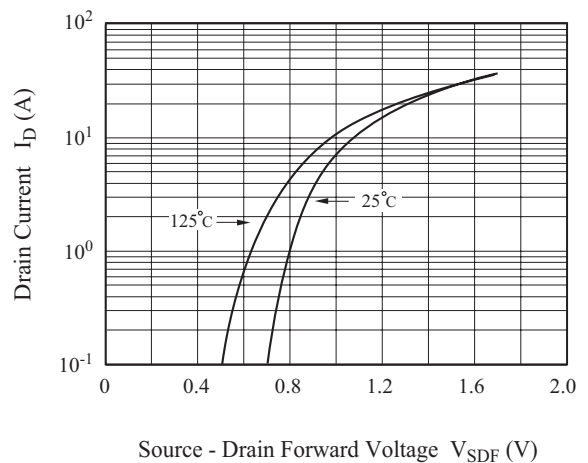


Fig7.  $BV_{DSS} - T_j$

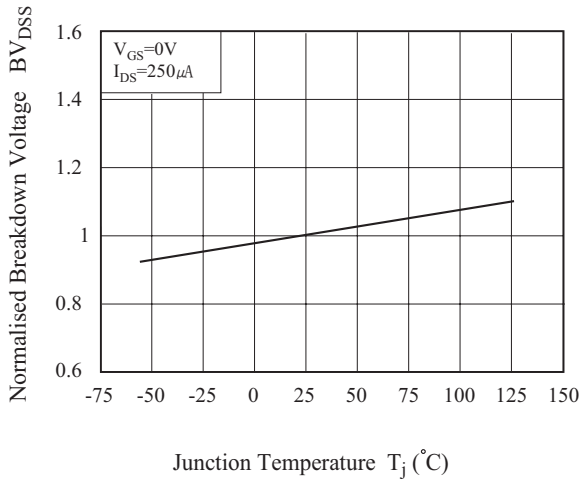


Fig8.  $C - V_{DS}$

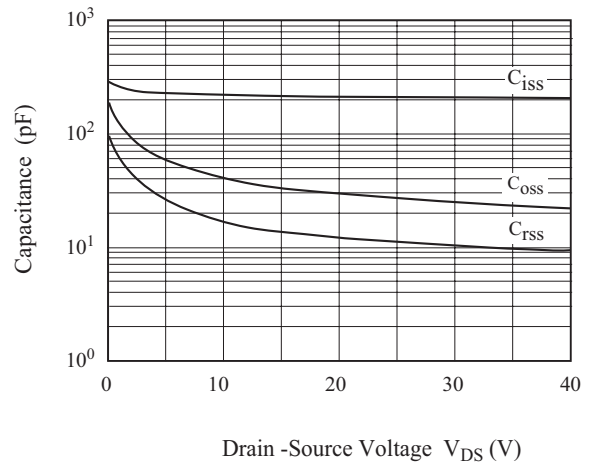


Fig9.  $Q_g - V_{GS}$

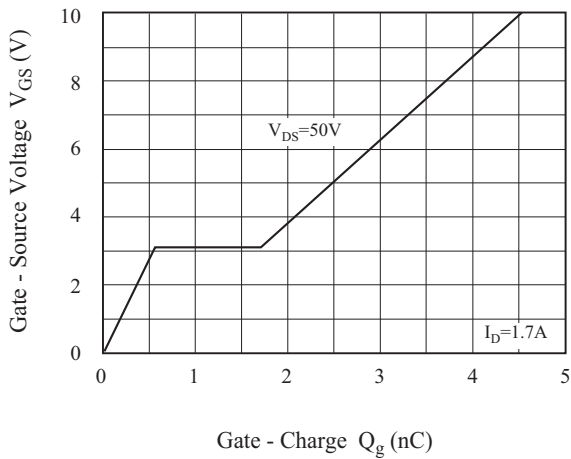


Fig10. Safe Operation Area

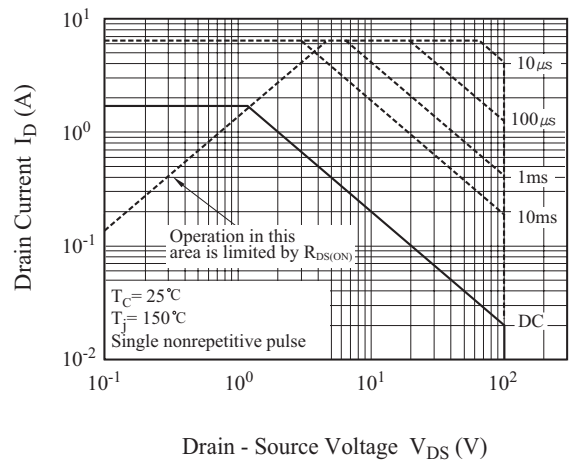


Fig11. Transient Thermal Response Curve

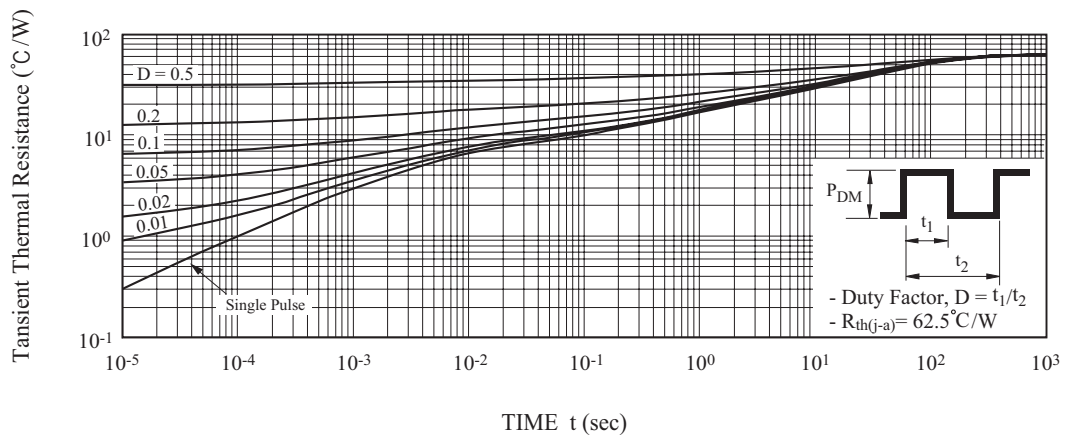


Fig12. Gate Charge

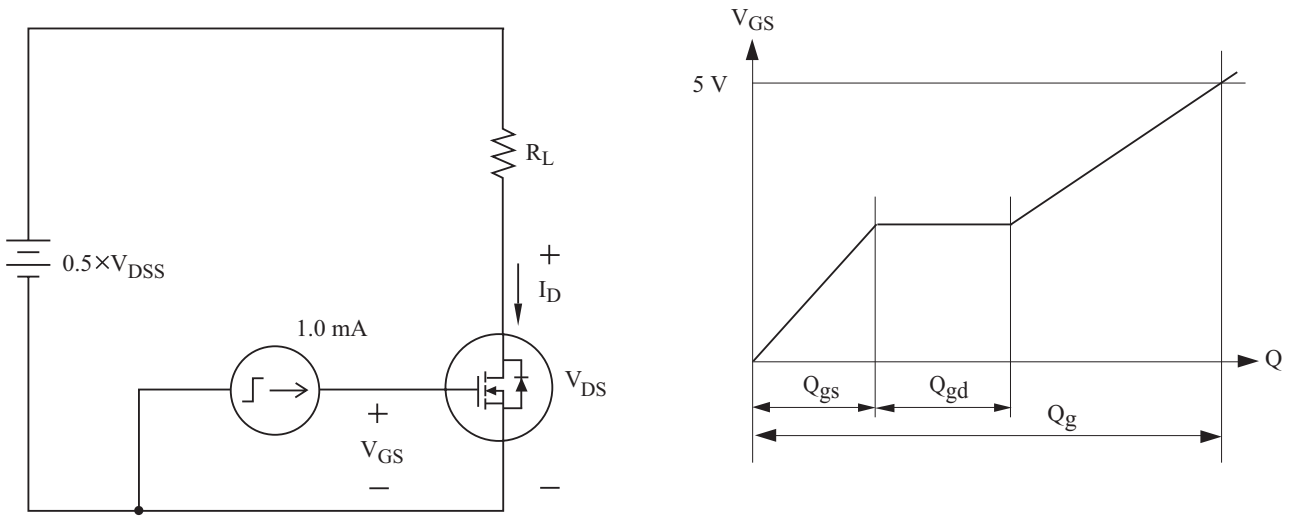


Fig13. Single Pulsed Avalanche Energy

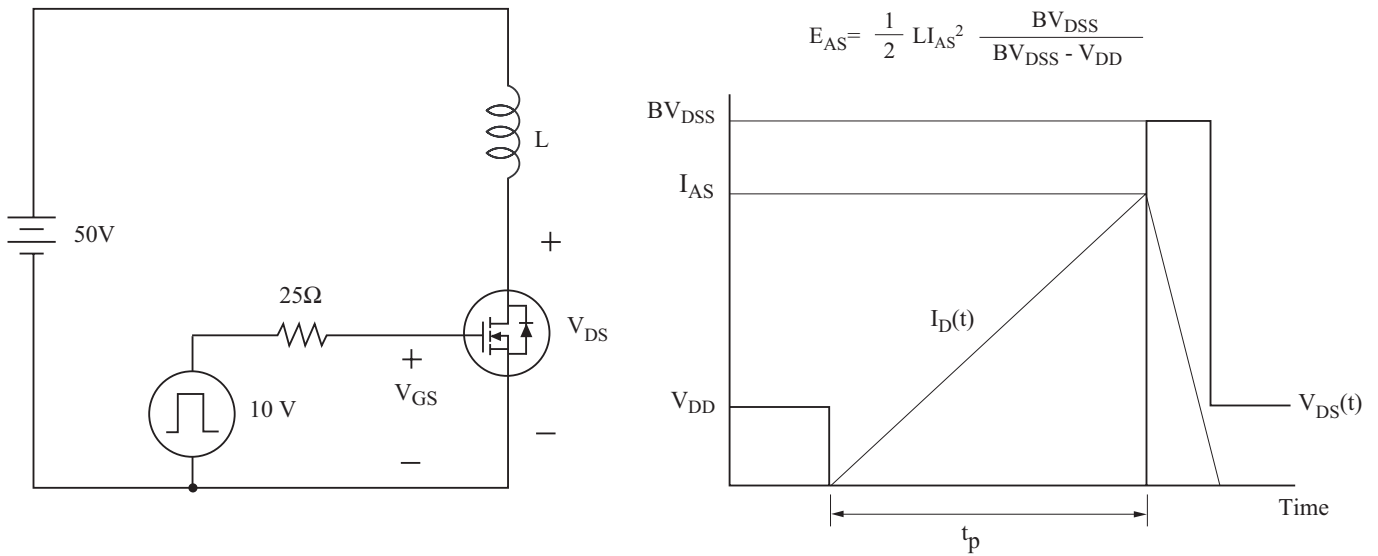


Fig14. Resistive Load Switching


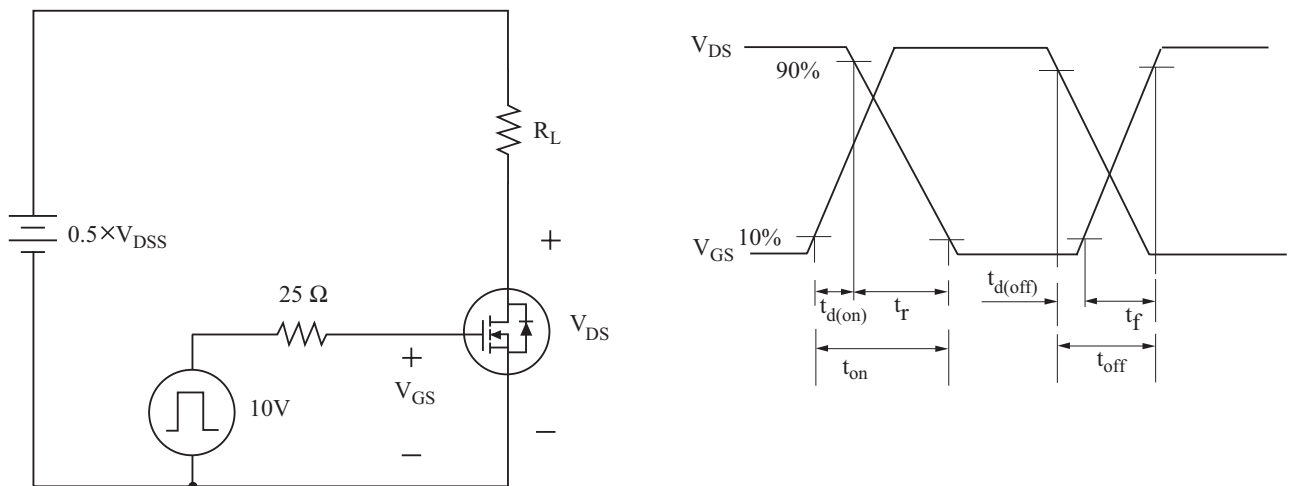


Fig15. Source - Drain Diode Reverse Recovery and  $dv/dt$



# KU3600N10WZ

Fig16. Recommended Pad Dimension

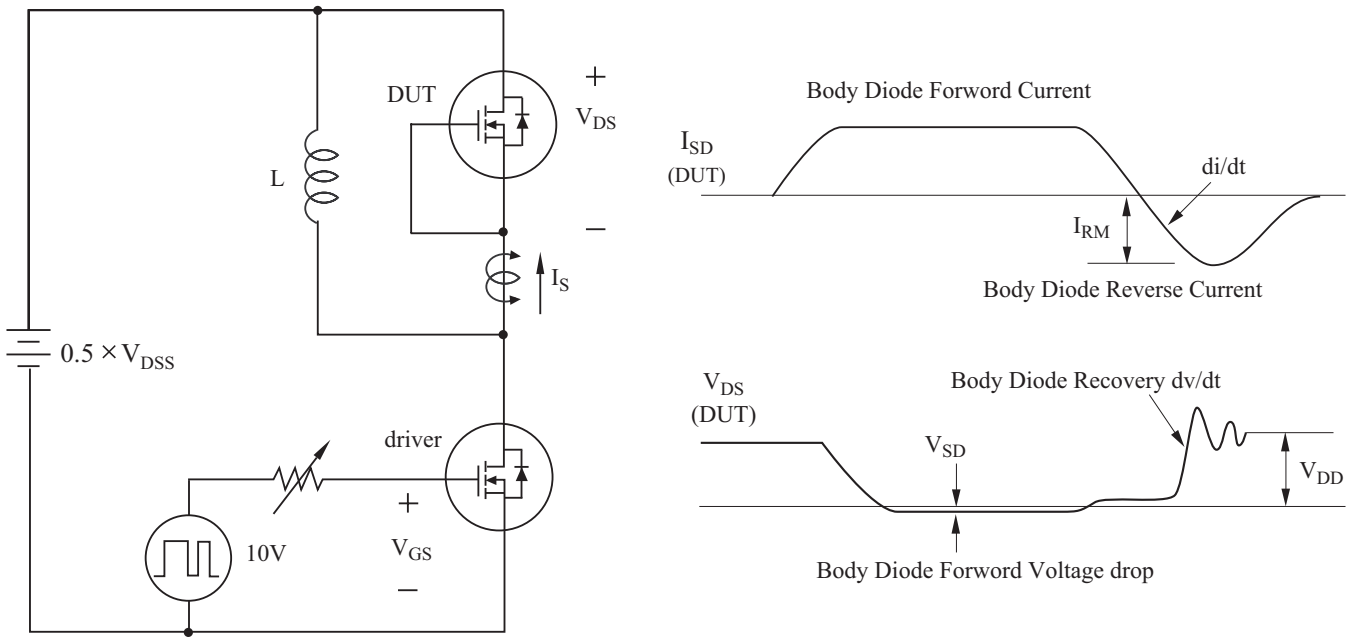