

General Description

This planar stripe MOSFET has better characteristics, such as fast switching time, low on resistance, low gate charge and excellent avalanche characteristics. It is mainly suitable for switching mode power supplies.

FEATURES

- $V_{DSS} = 600V$, $I_D = 2.0A$
- $R_{DS(ON)} = 4.4$ (Max) @ $V_{GS} = 10V$
- $Q_g(\text{typ}) = 6.0nC$

ORDERING INFORMATION




FULL NAME	PACKAGE	SUFFIX	REMARK
KF2N60I-U/HS	IPAK(1)	-	*NRND
KF2N60I-U/HSC	IPAK(2)	Added code "C" to IPAK(2)	-

*NRND : Not Recommended for new design

MAXIMUM RATING (Tc=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT	
Drain-Source Voltage	V_{DSS}	600	V	
Gate-Source Voltage	V_{GSS}	± 30	V	
Drain Current	$T_C=25$	2.0	A	
	$T_C=100$	1.2		
	Pulsed (Note1)	4.0		
Single Pulsed Avalanche Energy (Note 2)	E_{AS}	60	mJ	
Repetitive Avalanche Energy (Note 1)	E_{AR}	2.3	mJ	
Peak Diode Recovery dv/dt (Note 3)	dv/dt	4.5	V/ns	
Drain Power	P_D	$T_C=25$	40.3	W
Dissipation		Derate above 25	0.32	W/
Maximum Junction Temperature	T_j	150		
Storage Temperature Range	T_{stg}	-55 150		
Thermal Characteristics				
Thermal Resistance, Junction-to-Case	R_{thJC}	3.1	/W	
Thermal Resistance, Junction-to-Ambient	R_{thJA}	110	/W	

PIN CONNECTION

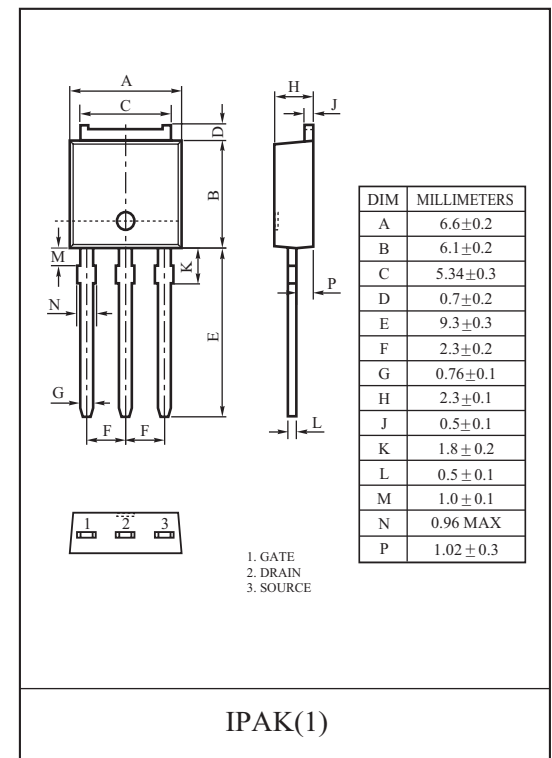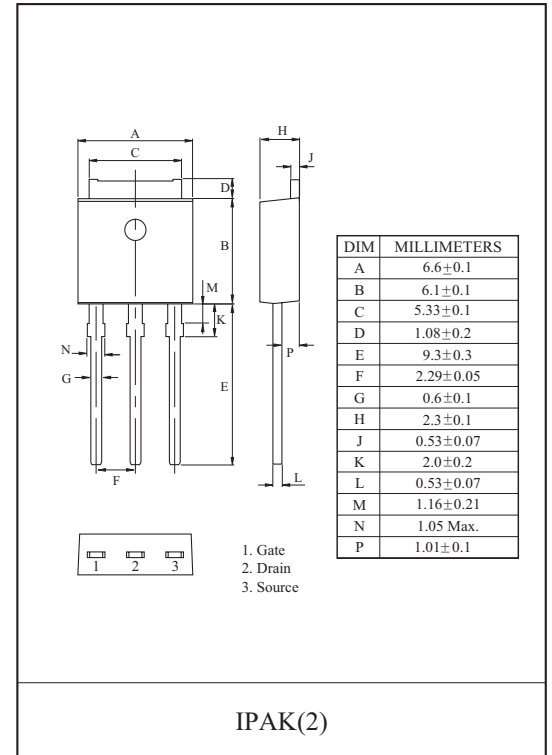

KF2N60I

ELECTRICAL CHARACTERISTICS (Tc=25)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=250\mu A$, $V_{GS}=0V$	600	-	-	V
Breakdown Voltage Temperature Coefficient	BV_{DSS}/T_j	$I_D=250\mu A$, Referenced to 25	-	0.6	-	V/
Drain Cut-off Current	I_{DSS}	$V_{DS}=600V$, $V_{GS}=0V$,	-	-	10	μA
Gate Threshold Voltage	V_{th}	$V_{DS}=V_{GS}$, $I_D=250\mu A$	2.5	-	4.5	V
Gate Leakage Current	I_{GSS}	$V_{GS}=\pm 30V$, $V_{DS}=0V$	-	-	± 100	nA
Drain-Source ON Resistance	$R_{DS(ON)}$	$V_{GS}=10V$, $I_D=1A$	-	3.7	4.4	
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=480V$, $I_D=2A$ $V_{GS}=10V$ (Note4,5)	-	6.0	-	nC
Gate-Source Charge	Q_{gs}		-	1.0	-	
Gate-Drain Charge	Q_{gd}		-	2.8	-	
Turn-on Delay time	$t_{d(on)}$	$V_{DD}=300V$ $I_D=2A$ $R_G=25$ (Note4,5)	-	10	-	ns
Turn-on Rise time	t_r		-	20	-	
Turn-off Delay time	$t_{d(off)}$		-	25	-	
Turn-off Fall time	t_f		-	20	-	
Input Capacitance	C_{iss}	$V_{DS}=25V$, $V_{GS}=0V$, $f=1.0MHz$	-	270	-	pF
Output Capacitance	C_{oss}		-	35	-	
Reverse Transfer Capacitance	C_{rss}		-	3.9	-	
Source-Drain Diode Ratings						
Continuous Source Current	I_S	$V_{GS}<V_{th}$	-	-	2	A
Pulsed Source Current	I_{SP}		-	-	8	
Diode Forward Voltage	V_{SD}	$I_S=2A$, $V_{GS}=0V$	-	-	1.4	V
Reverse Recovery Time	t_{rr}	$I_S=2A$, $V_{GS}=0V$, $dI_S/dt=100A/\mu s$	-	290	-	ns
Reverse Recovery Charge	Q_{rr}		-	0.9	-	μC

Note 1) Repetivity rating : Pulse width limited by junction temperature.

Note 2) $L=28mH$, $I_S=2A$, $V_{DD}=50V$, $R_G=25$, Starting $T_j=25$.

Note 3) $I_S=2A$, $dI/dt=100A/\mu s$, $V_{DD}=BV_{DSS}$, Starting $T_j=25$.

Note 4) Pulse Test : Pulse width $300\mu s$, Duty Cycle 2%.

Note 5) Essentially independent of operating temperature.

Marking

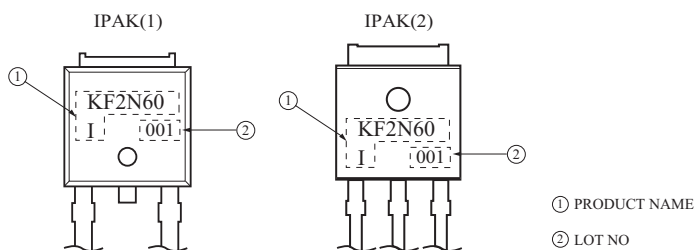


Fig1. $I_D - V_{DS}$

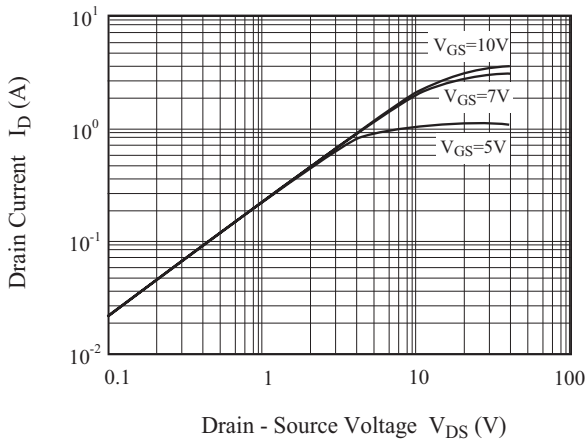


Fig2. $I_D - V_{GS}$

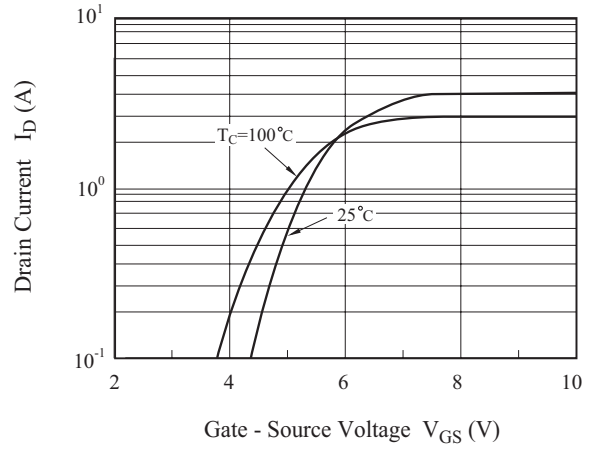


Fig3. $BV_{DSS} - T_j$

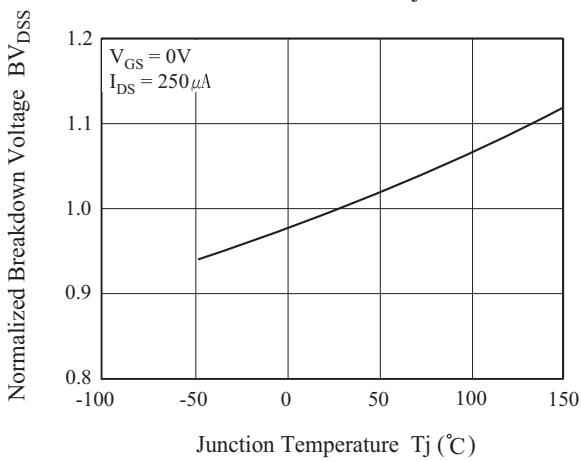


Fig4. $R_{DS(ON)} - I_D$

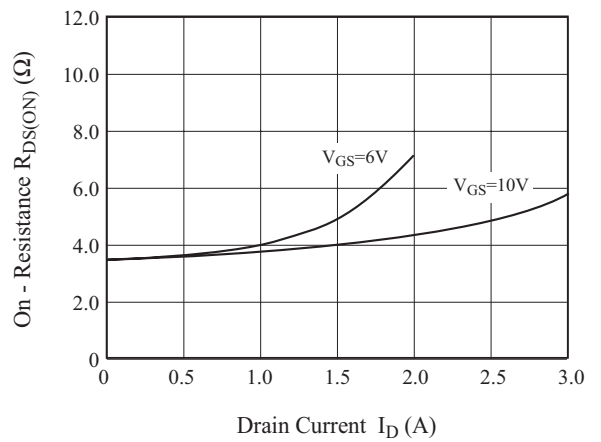


Fig5. $I_S - V_{SD}$


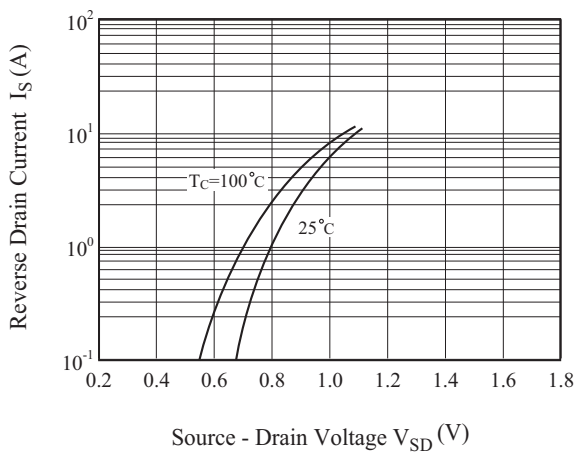


Fig6. $R_{DS(ON)} - T_j$

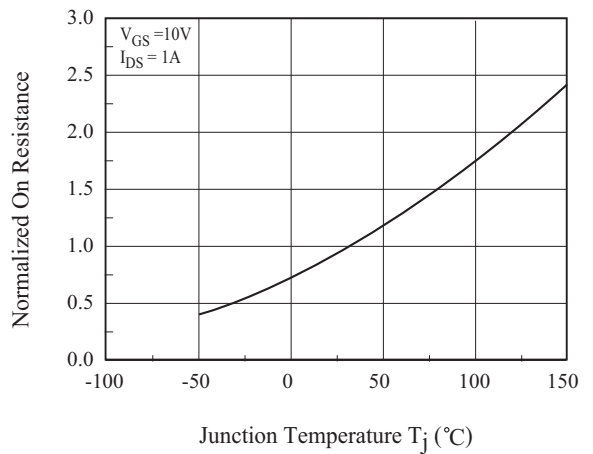

KF2N60I

Fig 7. C - V_{DS}

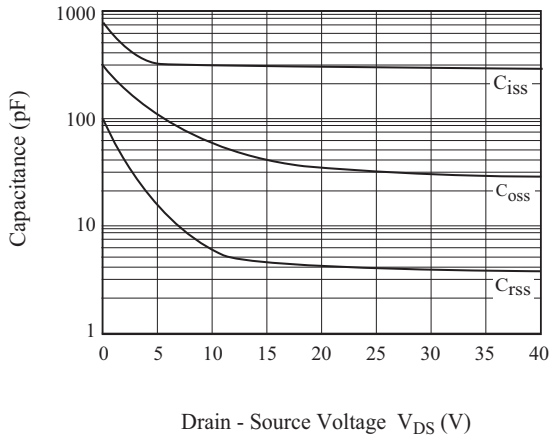


Fig8. Q_g- V_{GS}

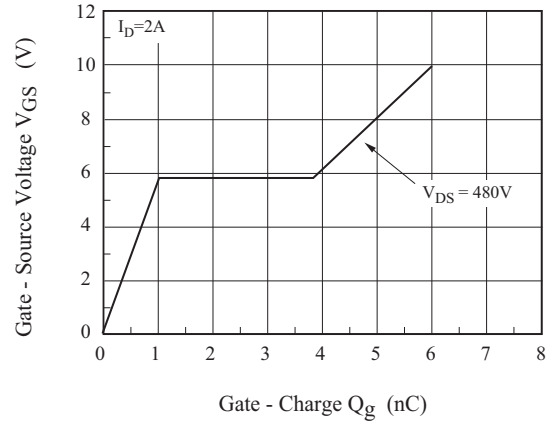


Fig9. Safe Operation Area

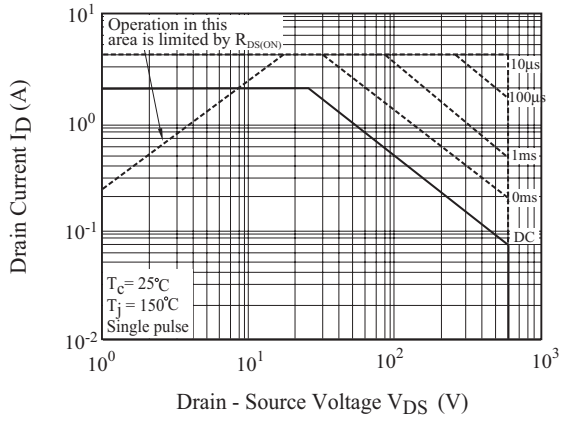


Fig10. I_D - T_j

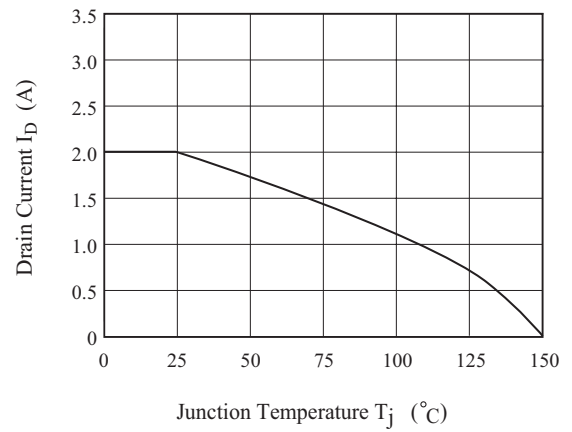


Fig11. Transient Thermal Response Curve

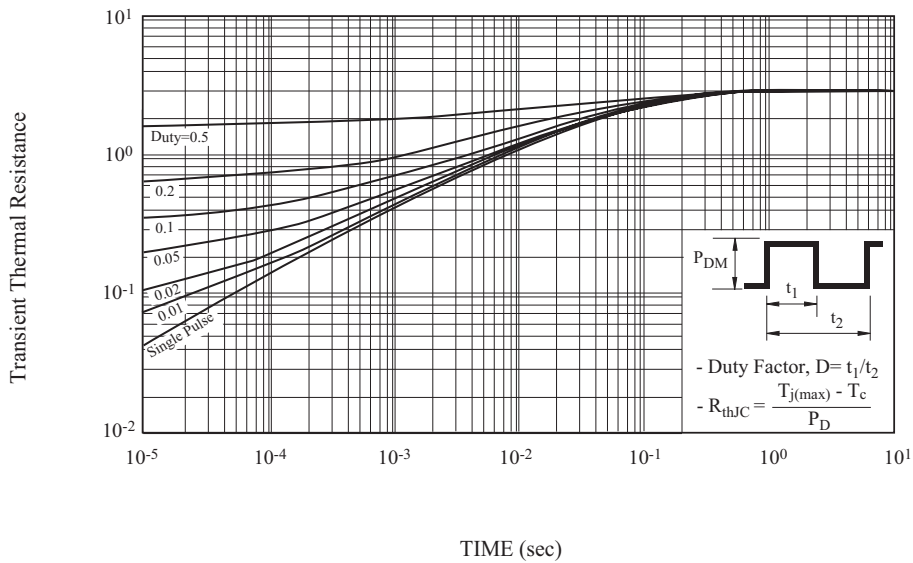


Fig12. Gate Charge

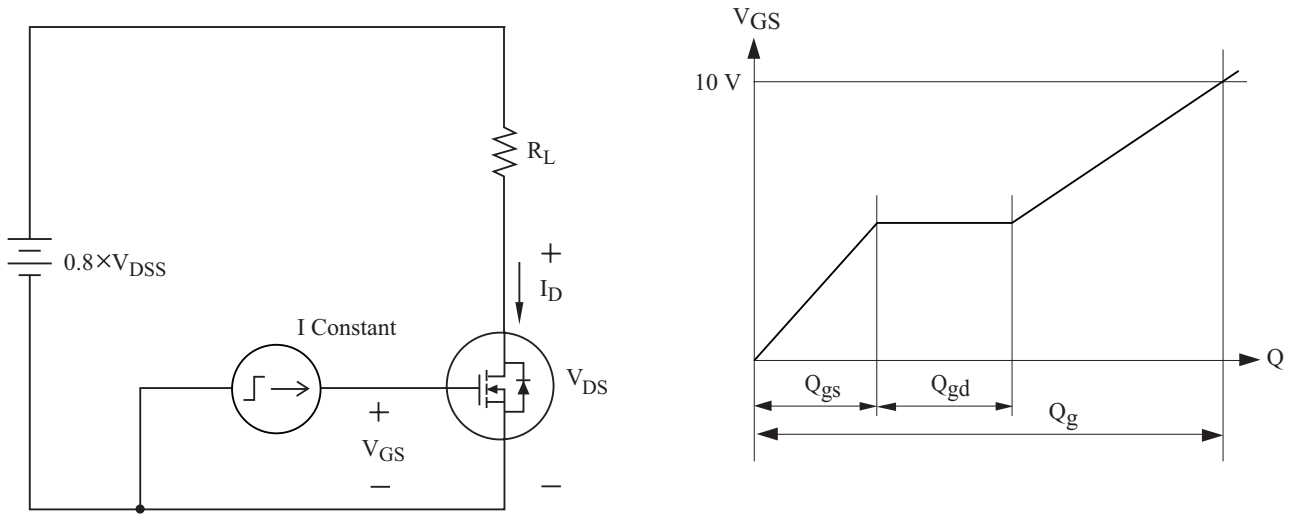


Fig13. Single Pulsed Avalanche Energy

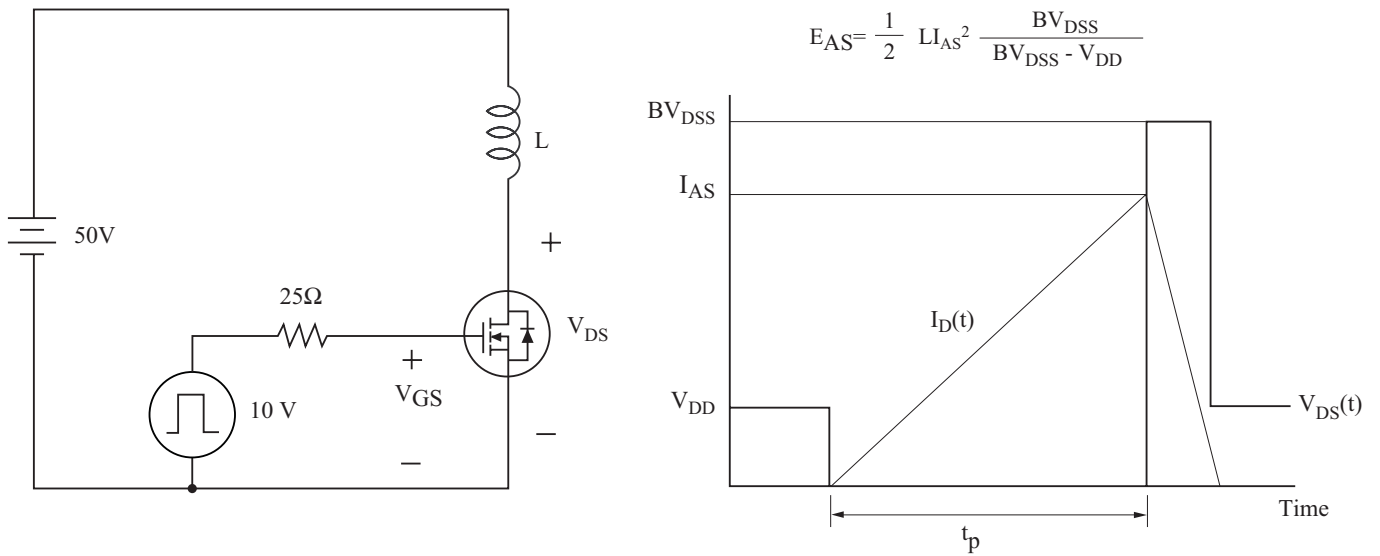


Fig14. Resistive Load Switching

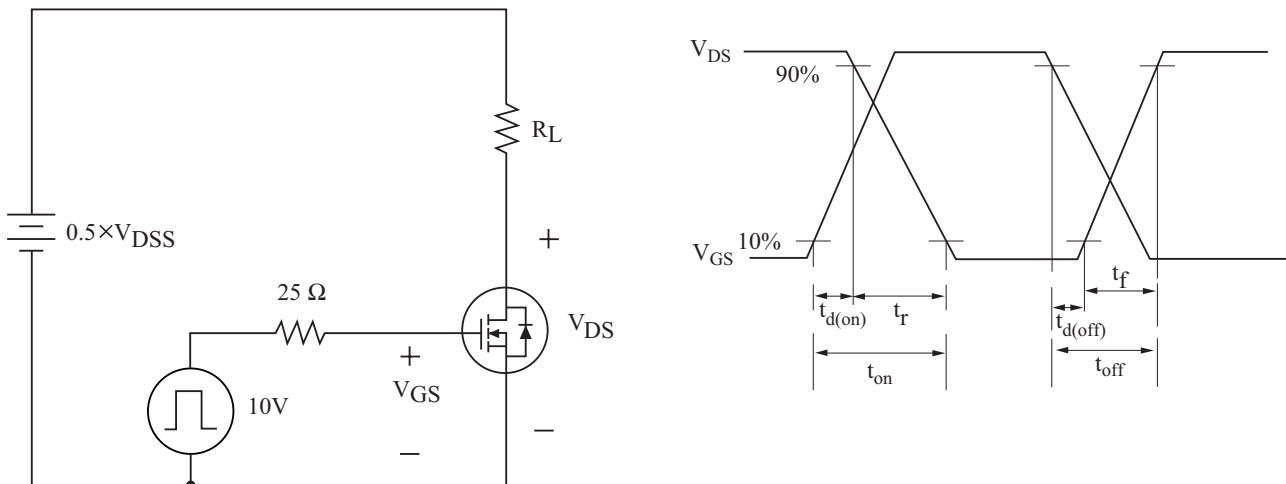


Fig15. Source - Drain Diode Reverse Recovery and dv/dt

